



## User's Manual



### Important

- Before installing this cabinet, make sure you read this manual.
- Be sure to follow the instructions stated in this manual and pay attention to each guideline in order to correctly install this cabinet.
- Carefully keep this manual and place it in a convenient place for future references.
- No further notice will be issued when this cabinet and parts are to be modified.

## About this manual

This Manual provides instructions for the installation, setup, use, maintenance and repair of this product.

The main purpose of this manual is to provide instructions for operating the cabinet and safeguard personnel's safety during their operation so as to guarantee correct operation of this product. Users must abide by all safety guidelines and pay attention to warning labels to avoid injuries to personnel and damage to the cabinet.

Non-technicians should not maintain or repair this product. Technicians refer to personnel with a high school degree or above in mechanical engineering or electrical engineering, or workers equipped with similar working skills and engage in the maintenance, management and repair of game cabinets on a daily basis.

Keep this manual for your future references. Moreover, when assigning others to move, install, maintain and repair the cabinet, all store owners should first read the related content stated in this manual, and instruct related personnel to follow corresponding rules.

### Disclaimer

IGS does not warrant the correctness and completeness of this manual either in direct or indirect ways, nor does it warrant the commercial or general applications for specific purposes. IGS reserves the right to modify or change this manual and no prior notice will be given.

### Trademarks

IGS® is the registered trademark of International Games System Co., Ltd.

© Copyright owned 2015, International Games System Co., Ltd.

Without prior written permission, copying any content of this manual in any format is prohibited. All trademarks and business identity icons used in this document are the property of their legal owners.

## Safety Guidelines

# Safety Guidelines



### Ordinary

- Without the permission from our designated personnel, do not disassemble, change or remodel our products.
- Be sure to operate this product according to the instructions of this manual. Any inappropriate operation would damage this product and threaten the personal safety of players as well as onlookers.
- Routinely check, maintain and repair this product.
- Keep each warning label on this product clean in order to make sure the descriptions are readable. If the filthiness on the label could not be got rid of or descriptions are indistinct, immediately replace the labels.



### Power

- Before plugging in the cabinet, first make sure the voltage in accordance with local power standard, or fires and electric shocks might occur.
- When plugging in the cabinet, use an outlet with ground wire.
- Do not expose electrical cords and ground wires on hallway, or damage, electric shocks and short circuit might occur.
- Do not place flammable items near electrical cords to avoid fires.
- If electrical cords are to be damaged, replace new ones with your local distributor.
- To avoid electric shocks or short circuits:
  - Before repair or maintenance, power must be turned off.
  - Do not touch plugs with wet hands.
  - Do not immediately unplug or plug in the cabinet.
  - When unplugging the electric cord, tightly hold the plug and avoid pulling the electric cord.



### During the play

- To prevent customers from being injured or encountering accidents, people apply to the following categories should avoid using this product:
  - People with unsatisfactory health conditions such as patients of hypertension or heart disease.
  - People with injuries or are physically disabled.
  - People wearing slippery shoes or high heels.
  - People who are unable to step on the pedal when sitting.
  - People who are pregnant, drunk or would easily feel dizzy.
- If customers feel uncomfortable during their play, remind them to pause or discontinue the play.
- Remind customers to carefully read the warning labels as well as other reminding descriptions, and operate according to instructions to avoid electric shocks or short circuits, etc.

# Contents

<b>About this manual .....</b>	<b>1</b>	4.3.6 Screen test .....	23
<b>Safety Guidelines .....</b>	<b>2</b>	4.3.7 Counter test .....	23
<b>Contents .....</b>	<b>3</b>	4.3.8 Ticket machine test .....	24
<b>1. Introduction of the cabinet 4</b>		4.4 Game settings.....	24
1.1 List of accessories .....	4	4.4.1 Flow settings .....	25
1.2 Overview of the cabinet .....	5	4.4.2 Coin settings .....	25
1.3 Assembled parts of the cabinet.....	6	4.4.3 Volume settings .....	26
1.4 Specification of the cabinet.....	8	4.4.4 Lamp settings .....	26
<b>2. Installation and connection 9</b>		4.4.5 Ticket machine settings .....	27
2.1 Moving the cabinet.....	9	4.4.6 Weight limit settings .....	28
2.2 Install the cabinet .....	10	4.4.7 Time settings .....	28
2.3 Locating the cabinet.....	11	4.4.8 Password settings .....	29
<b>3. Interduction of the game 12</b>		4.4.9 Restore default settings .....	29
3.1 An overview of the game.....	12	4.4.10 Reset ranking .....	30
3.2 Distinctive plays .....	12	4.5 Income data .....	31
3.3 Game control .....	13	4.5.1 Daily Income .....	31
3.4 Game display .....	14	4.5.2 Monthly income .....	32
<b>4. Operator setting 15</b>		4.5.3 Total income .....	33
4.1 Framework of the menu.....	15	4.5.4 Income data reset .....	34
4.2 Using the operation settings .....	18	<b>5. Maintenance and repair 35</b>	
4.3 Hardware test.....	19	5.1 Daily inspection.....	35
4.3.1 Hardware auto test .....	19	5.2 Cleanness and maintenance .....	35
4.3.2 I/O test .....	20	5.3 Replacing parts.....	36
4.3.3 Motor test .....	21	5.3.1 Replacing the rein sensor .....	36
4.3.4 Lamp test .....	22	5.3.2 Replacing the confirm button .....	36
4.3.5 Speaker test .....	22	5.3.3 Replacing the dolphin body LED .....	37
		5.3.4 Replacing the I / O board .....	38
		5.3.5 Replacing the speaker .....	39
		5.3.6 Replacing the main board .....	39
		5.3.7 Replacing the coin slot .....	40
		5.3.8 Replacing the screen and the LED .....	41
		5.3.9 Replacing AMP .....	42
		<b>6. Troubleshooting 43</b>	
		<b>Appendix: Wiring diagram of the cabinet 44</b>	







Introduction of the cabinet

1 Introduction of the cabinet


1.1 List of accessories

After your purchase of this product, check if the following parts are all included. If any part is missing or damaged, contact your local distributor.

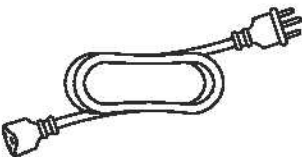Name of accessories	Picture	Quantity	Notes
AC cord		1	
User's manual		1	
Controlling panel key		2	
Coin slot key		2	

1.2 Overview of the cabinet


■ Viewed from the front and side

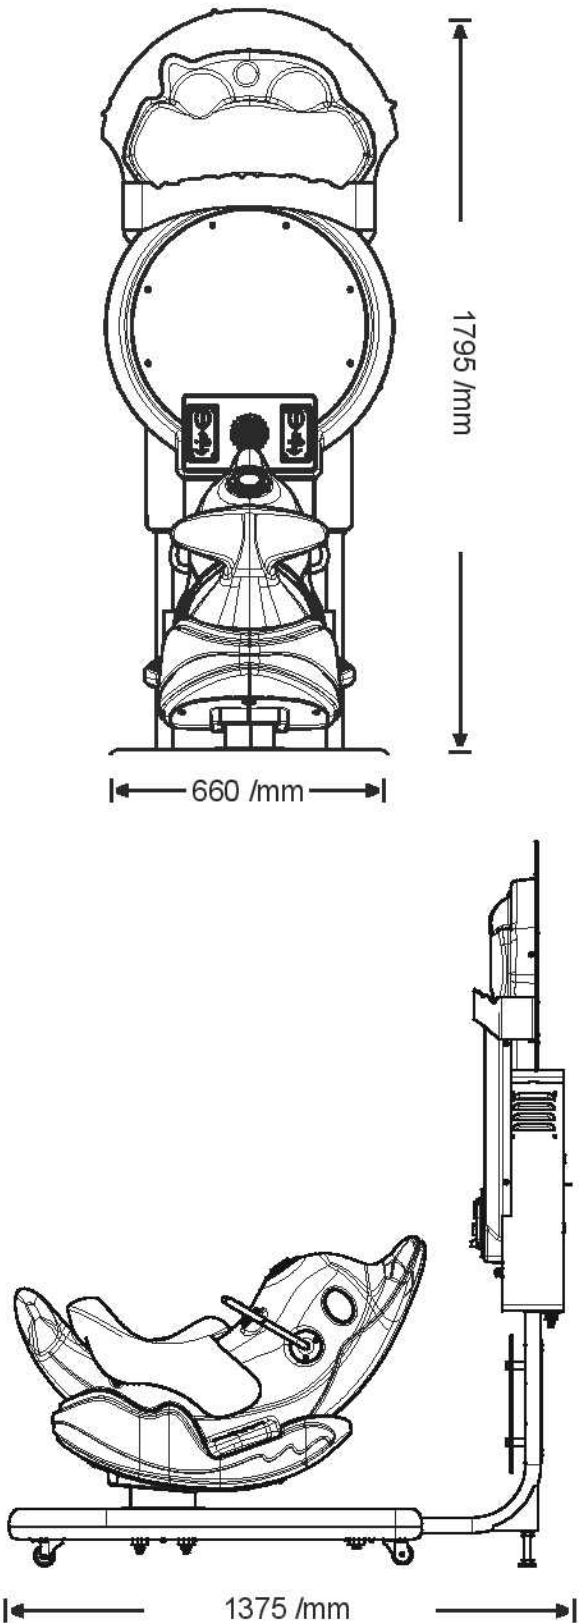

## Introduction of the cabinet


### 1.3 Assembled parts of the cabinet

■ Name of the exterior parts

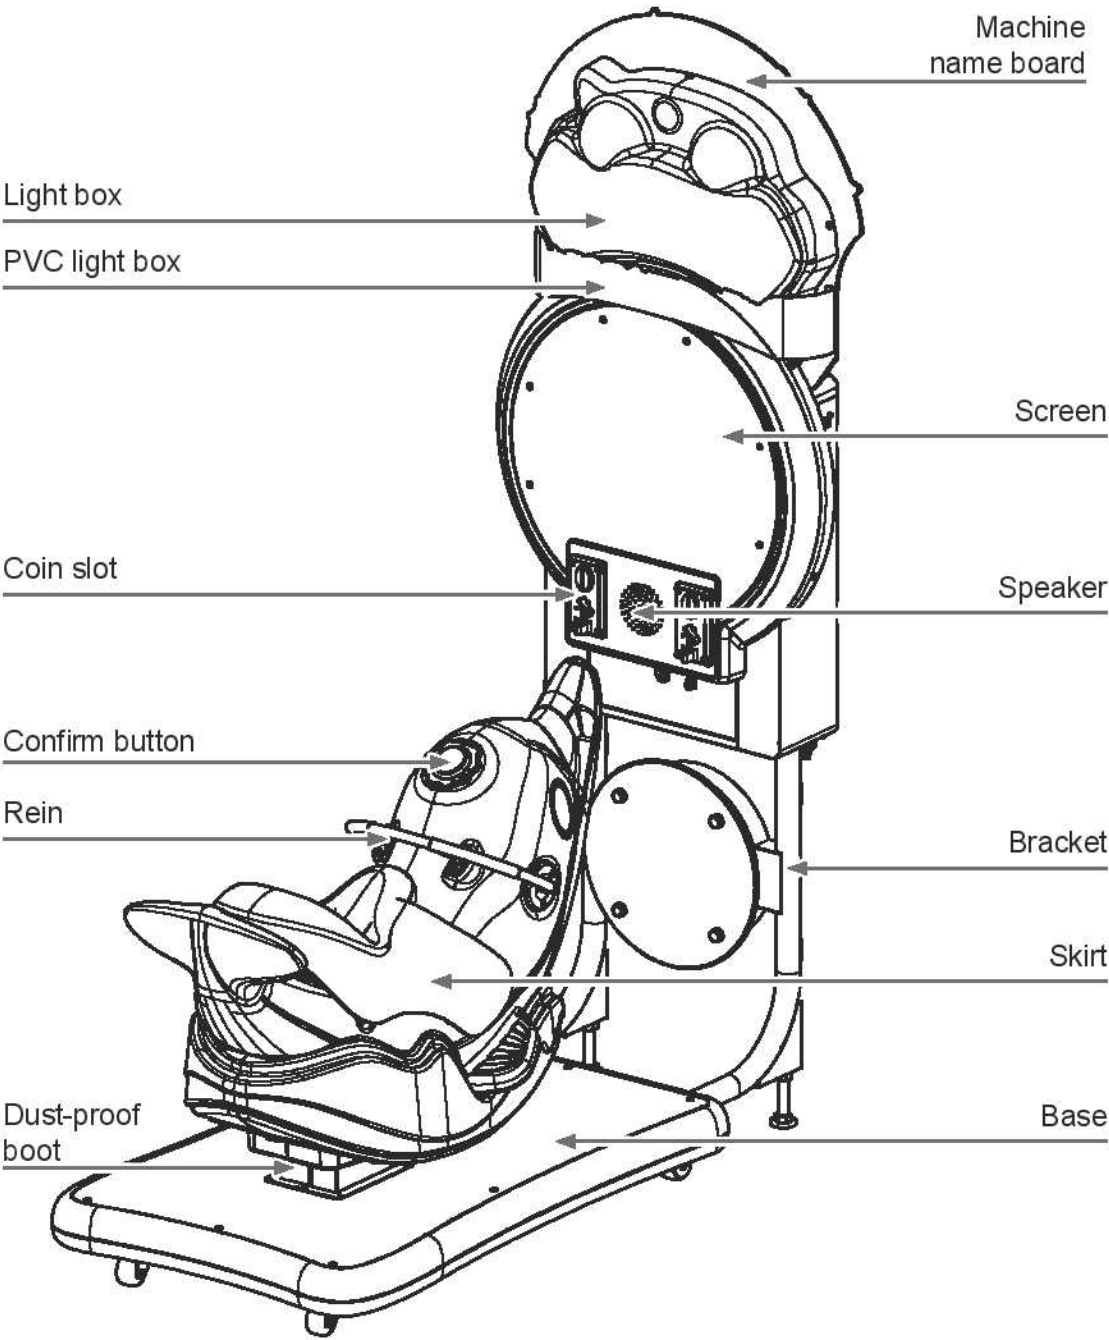


## Introduction of the cabinet

### ■ Name of the interior parts

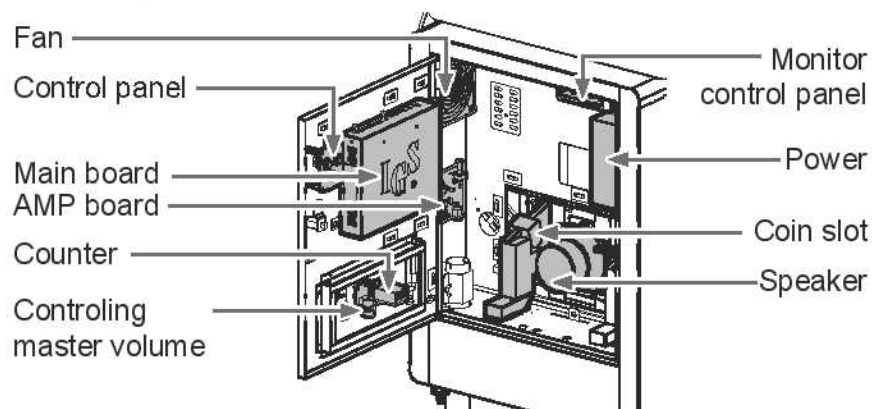

### ■ Name of main board parts

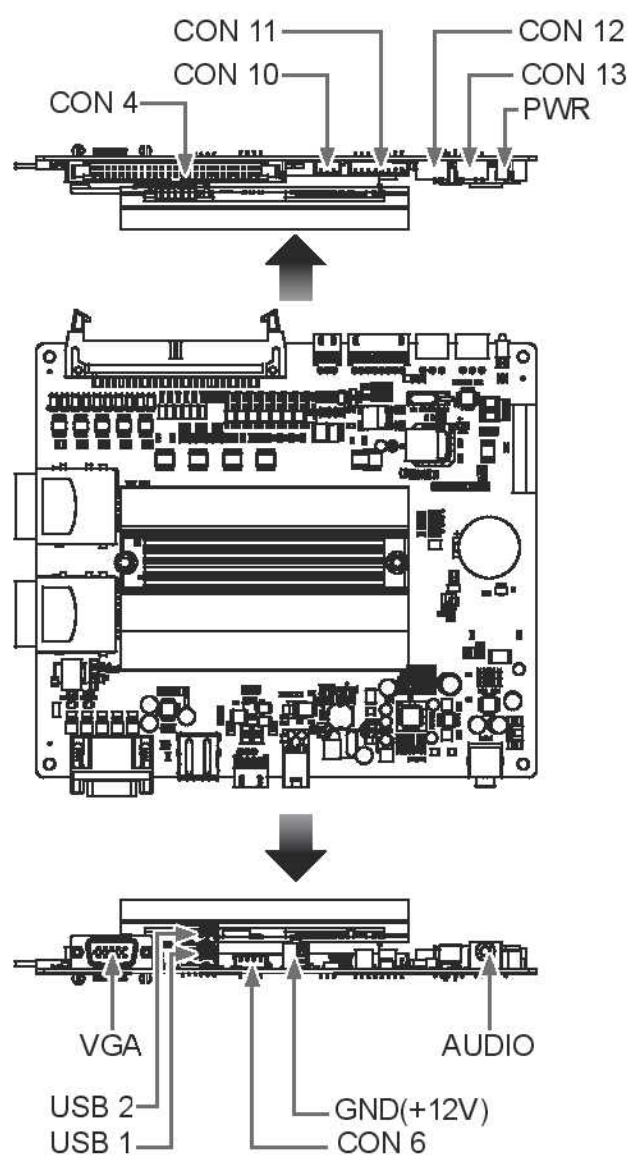



## Introduction of the cabinet

### 1.4 Specification of the cabinet

Category	Items	Specification
Concrete item	Size of the cabinet	(W)660mm X (L)1375mm X(H)1795mm
	Weight	110KG
Power	Power	110V / 220V(According to local power standard)
	Total power	400W
Main cabinet	Cabinet	MA board
	Power amplifier	AMP set of full range: 15W
Buttons and operations	Dolphin body	VLT-TN-BK-E-CW (Wth LED)
	Interior parts	Coin slot, Test, Select, Service / Enter
Light sets	Screen frame	RGB LED light strip
	Dolphin body	RGB LED light strip
	Base	RGB LED light strip
Fan	Power	110V / 220V (According to local power standard)
Screen	Type	LCD
	Size	19 inches
	Power	DC12V
Speakers	Size / Resistance / Power	4 inches / 8Ω / 20W
Environment	Operating temperature	0℃ ~ 40℃
	Storing temperature	-10℃ ~ 80℃
	Relative moisture	<85% None coagulation status
Motor	Rated voltage	110V / 220V (According to local power standard)
	Rated power	120W
	Rated RPM	1400 RPM

## 2. Installation and connection

### 2.1 Moving the cabinet

After your purchase of this product, first move the cabinet to the designated location for installation, then connect the wires. When you transport, move or consider where to install, make sure the following guidelines are followed.



#### Reminders for transporting

- When transporting this product with vehicles, fasten the casters rather than a tail so as to avoid damage to the cabinet.
- The monitor of the cabinet is fragile, and should be prevented from fierce vibrations or being hit by strong force.



#### Reminders for moving

- Before moving the cabinet, unplug the electric cord to avoid accidents.
- When moving this product, be aware of the obstacles and check if the surface of the ground ahead is stable to avoid accidents and damage to the cabinet.
- When moving this product, at least two personnel should work together so as to avoid accidents or injuries.




#### Reminders for installation


- This product should be placed indoors. Do not place it outdoors, or in the following locations:
  - Place under direct sunlight, leaking, damp and high temperature area.
  - Around inflammable, volatile and dangerous objects.
  - Places with a tilted, unstable surface or frequent vibration.
  - Close to the emergency exit or public facilities such as the fire extinguisher.
- The vent located in the side of this product is for the cabinet and screen to emit warm air, and do not place any item close to the vent, or malfunction might occur. Also, the screen is not equipped with an additional vent.
- A distance of 30 cm or more should be kept between the cabinet and walls, another cabinet or the hallway.

## Installation and connection


### 2.2 Install the cabinet

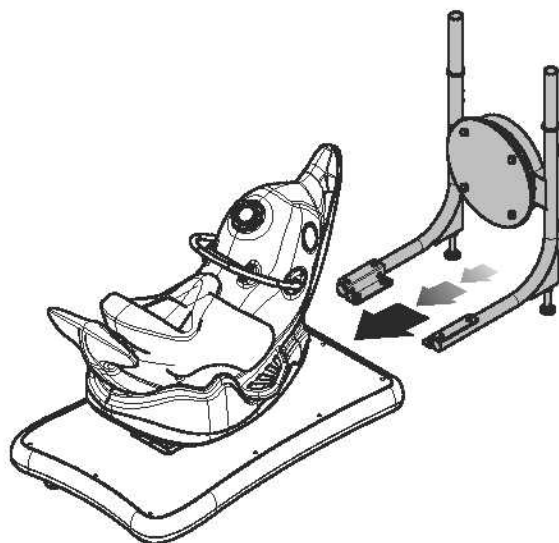


- ❶ Put the bracket into the base holder.

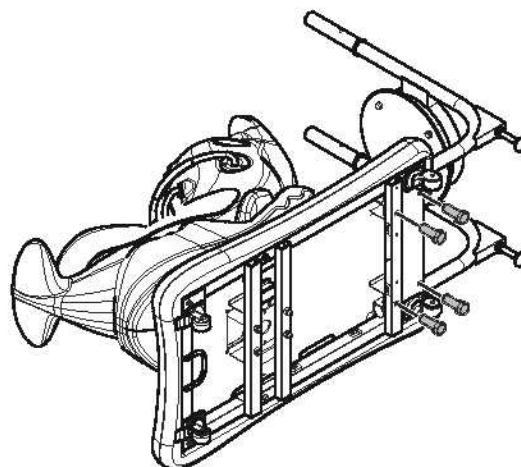


- ❷ Flipped the machine 90 degrees, using the specified screws attach it. (Please use the protective pads to protect the appearance of the dolphin body.)

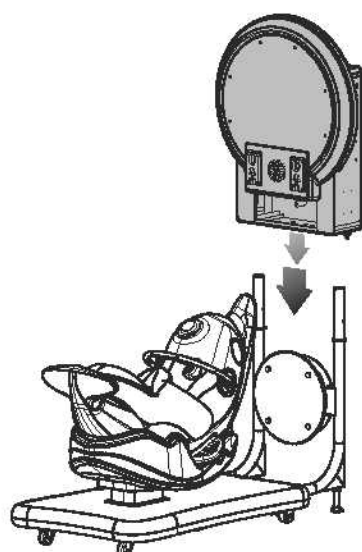


- ❸ Assembly the screen and the bracket.

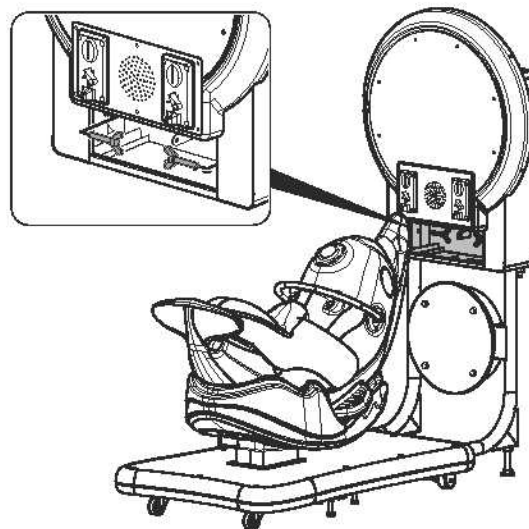

- ❹ After placing the screen frame is completed, open the maintenance and coin box and use the specified screws attach it.

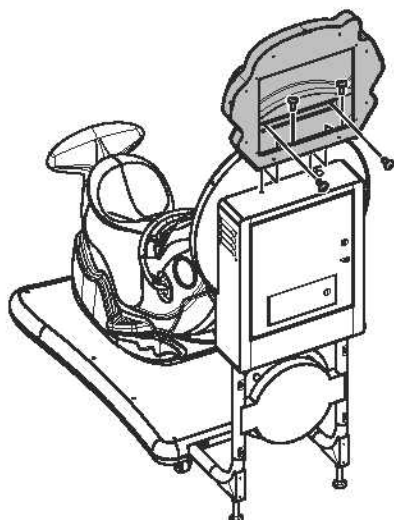


- ⑤ After placing the light box is completed, use the specified screws attach it.

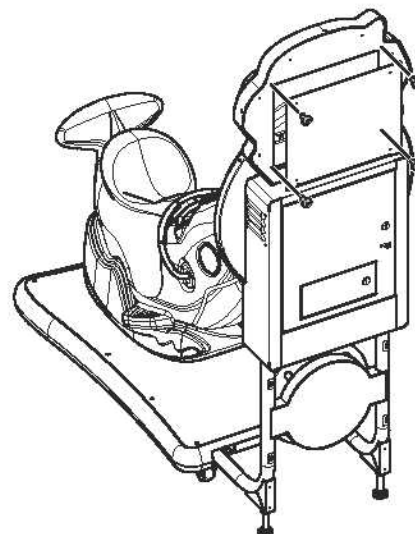


- ⑥ After placing the maintenance door of the light box is completed, use the specified screws attach it.

- ⑦ After placing the PVC light box and the machine name board is completed, use the specified screws attach it.

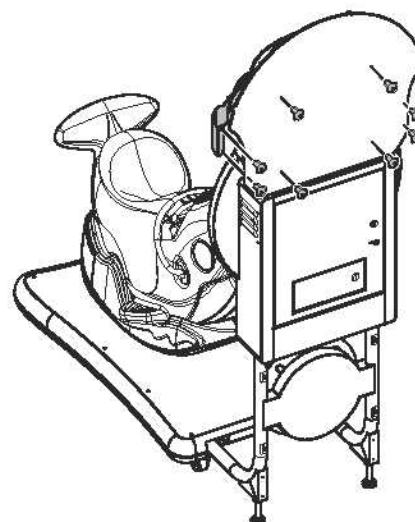


## 2.3 Locating the cabinet

Fasten the cabinet with the tail:  
Press the brake to fix the cabinet.

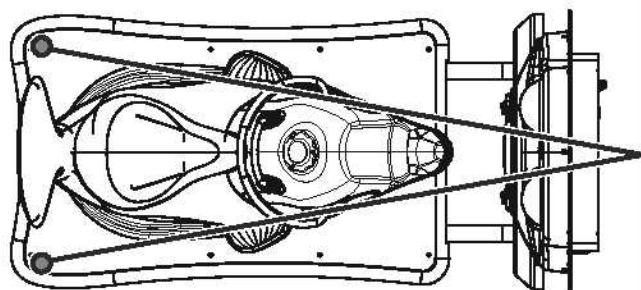

Press the brake to fix the cabinet.

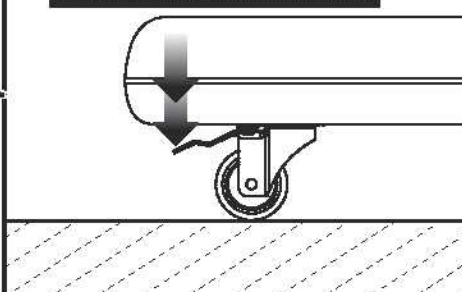



## Introduction of the game

# 3 Introduction of the game

## 3.1 An overview of the game

"Dolphin Star" is a unique and distinctive children's swinging machine. It consists of two stages. In the first stage, the player controls the little dolphin and collects starfishes in an open setting. In the second stage, the user opens fire to attack the cute boss. The game encompasses rich content, numerous scenes and tools, vocabulary learning, magnificent cabinet design, various lighting effects and swing motions that capture the attention of children, giving them a memorable experience.

## 3.2 Distinctive plays

### ■ Features

- 2 stages: collect starfish in the open world boss battle.
- Abundant content: 2 stages, English/Chinese learning, 4 roles, 2 scenes and many types of interactive item in game.



### 3.3 Game control

#### ■ Stage one: open world

- 1 Pull the reins Left / Right to turn your dolphin.



- 2 Pull the reins together to make your dolphin to jump.



- 3 Press the button to make your dolphin to perform.



#### ■ Stage two : Boss battle

- 1 Press the button to shoot.





Introduction of the game

3.4 Game display

■ Stage one




■ Stage two



# 4. Operator setting

## 4.1 Framework of the menu

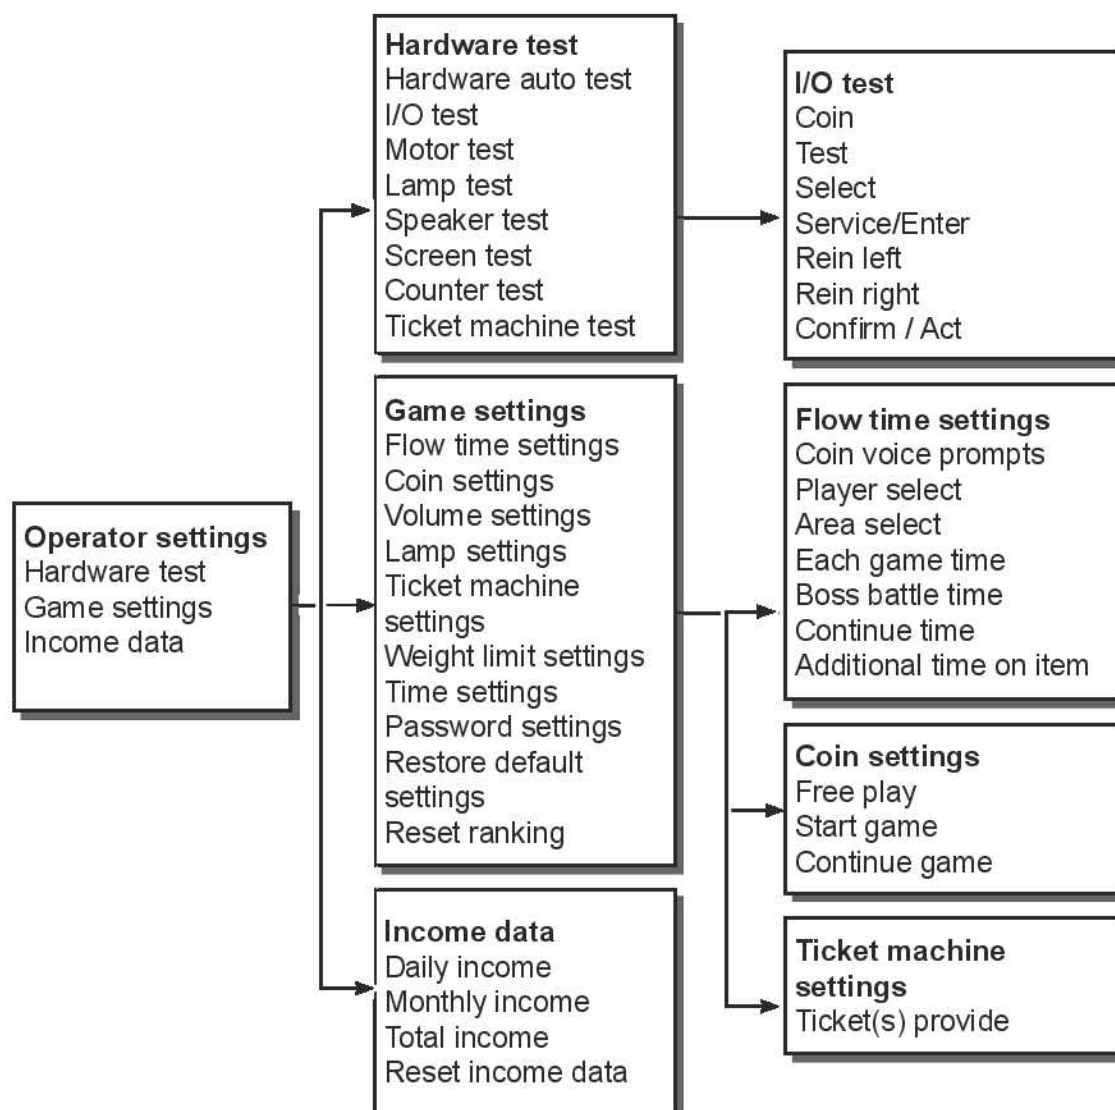



## Operator settings

Game settings		Default
Flow settings	【Coin voice prompts】 5, 10, 15 seconds.	10 seconds
	【Player select】 0: off, 5, 10, 15, 20 seconds.	15 seconds
	【Area select】 0: off, 5, 10, 15, 20 seconds.	10 seconds
	【Each game time】 1, 2, 3, 4 min.; 0, 5, 10, ~ 55 sec.	1min 50sec
	【Boss battle time】 10, 15, 20, ~60 seconds.	40 seconds
	【Continue time】 0: off, 5, 10, 15, 20 seconds.	15 seconds
	【Additional time on item】 0: off, 1, 2, ~ 10 seconds.	3 seconds
Coin settings	【Free play】 Off, On	off
	【Start game】 1, 2, 3, ~ 9 coin(s)	2coin(s)
	【Continue】 1, 2, 3, ~ 9 coin(s)	2coin(s)
Volume settings	【Daytime start】 On the hour 8 : 00	8:00
	【Master volume】 00, 10, 20 , ~ 100%	100%
	【Evening start】 On the hour 20 : 00	20:00
	【Master volume】 00, 10, 20 , ~ 100%	60%
	【Idle volume】 On, Off	On
	【Speech】 En + Ch, En Only	En + Ch

## Operator settings


Game settings			Default
Lamp settings	Daytime lamp settings	【 Daytime start 】 On the hour 8 : 00	8:00
		【 Screen lamp 】 Off, On	On
		【 Dolphinbody lamp 】 Off, On	On
		【 Base lamp 】 Off, On	On
	Evening lamp settings	【 Evening start 】 On the hour 20 : 00	20:00
		【 Screen lamp 】 Off, On	On
		【 Dolphinbody lamp 】 Off, On	On
		【 Base lamp 】 Off, On	On
Ticket machine settings	【 Ticket(s) provide 】 0, 1, 2, ~15 Ticket(s).		0 Ticket(s)
Weight limit settings	【 Weight limit 】 50, 60, ~90 KG.		50KG
Time settings	Set local time year / month / day / hour / minute.		Ex-factory date
Password setting	【 Password change 】 Enter old password > Enter new password > New password confirm.		000000
Restore default Settings	【 Restore default Settings 】 Yes / No		—
Reset rank	【 Reset ranking 】 Yes / No		—

## Operator settings

### 4.2 Using the operation settings


Make sure the cabinet is turned on and the game is displayed on the screen.

- 1 Open the door of the interior parts and press the **[Test]** button to the enter password page, and the screen will display as below:

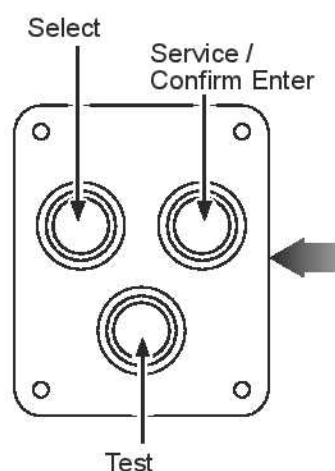

Enter the password and follow the instructions:

- 2 In **[Enter password]**, Press **[Service / Enter]** button and use **[Select]** button to change the number. Use **[Service / Enter]** button confirm number and select the next number. Default password: 000000.
- 3 After the password is correct, you will be able to enter the **[Operator settings]** main page, and the screen will display as below:

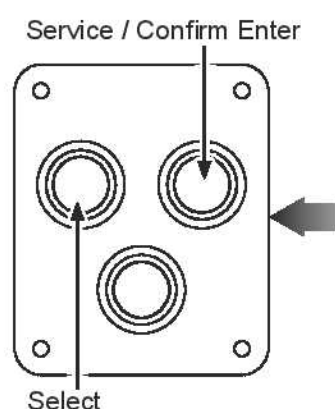


- 4 Use the **[Select]** button to move the cursor, and item where the cursor is pointed to will appear in red.
- 5 Use the **[Service / Enter]** button to confirm or enter the sub menu.
- 6 After setup or testing is completed, return to **[Operator settings]** and move the cursor to **[Exit]**. Then press the **[Service / Enter]** button to return to the game.

4.3 Hardware test

You can enter 【Hardware test】 to test if all hardware is normally function or not.

❶ Enter 【Operator settings】 → 【Hardware test】 , and the screen will display as below :

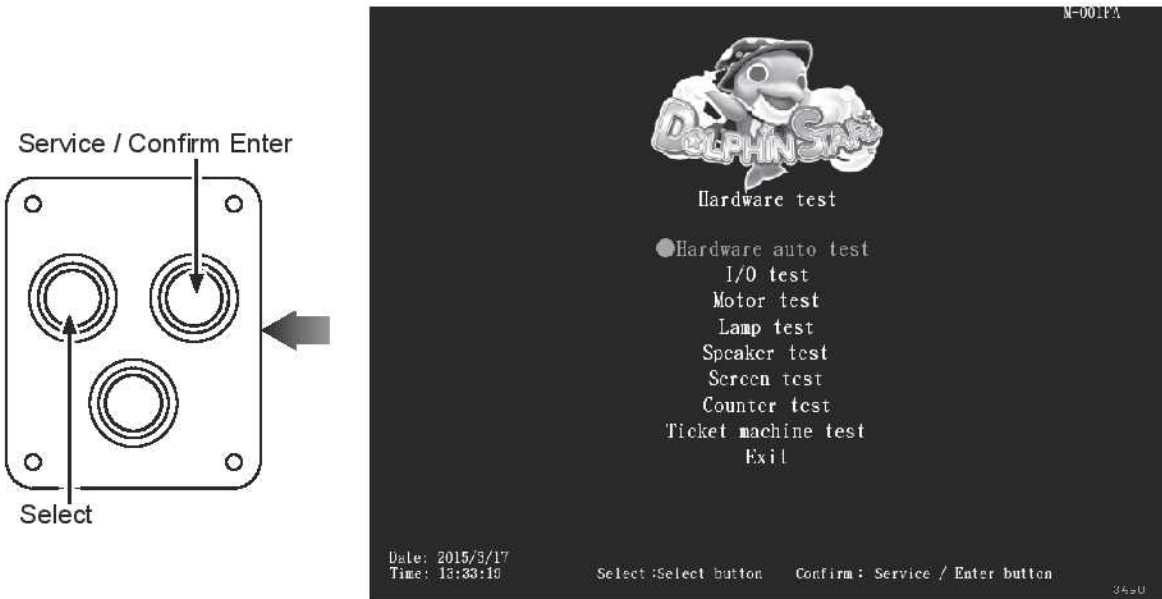


- ❷ Use the 【Select】 button to move the cursor, and item where the cursor is pointed to will appear in red.
- ❸ After the testing is conducted, move the cursor to 【Exit】 , then press the 【Service / Enter】 button to leave this page and return to the 【Operator setting】
- ❹ Regarding detailed descriptions of the sub menu in 【Hardware test】 , refer to the below content.

4.3.1 Hardware auto test

In the 【Hardware auto test】 page, the motor and the LED lamp will be auto testing, you can currently to know is all the hardware function correct.

❶ Enter 【Operator settings】 → 【Hardware test】 → 【Hardware auto test】 , and the screen will display as below :

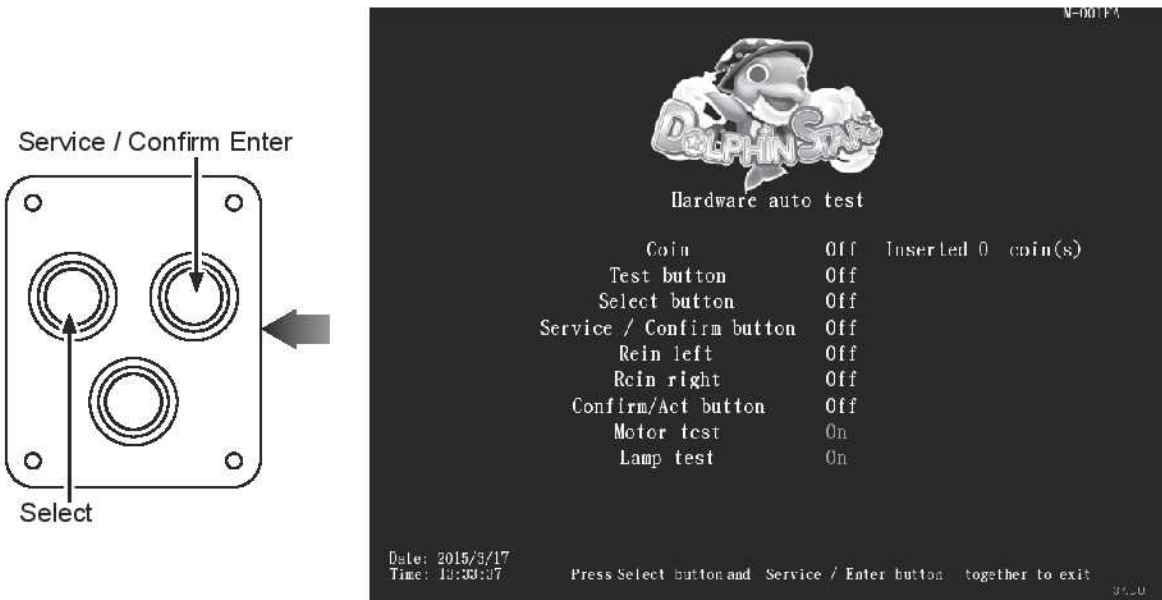



Operator settings

Enter 【Hardware auto test】 , you can run the testing of a specific application as explained in the chart below :



Application	Testing method	Results
Coin	Insert coin(s)	"Off" became "On" Coin has been inserted
Test	Press the button	"Off" became "On"
Select	Press the button	"Off" became "On"
Service / Enter button	Press the button	"Off" became "On"
Rein left	Pull the rein left	"Off" became "On"
Rein right	Pull the rein right	"Off" became "On"
Confirm / Act	Press the button	"Off" became "On"
Motor	Auto test	The dolphin body swing correct
Lamp	Auto test	RGB appear right

After testing is completed, Press the 【Select】 and 【Service / Enter】 together to return 【Hardware test】 .

4.3.2 I/O test

In the page of 【I/O test】 , you can run the testing of specific application to see if it is normally functioning or not. Well-sensed devices will be shown with a corresponding "On".

Enter 【Operator settings】 → 【Hardware test】 → 【I/O test】 , and the screen will display as below :

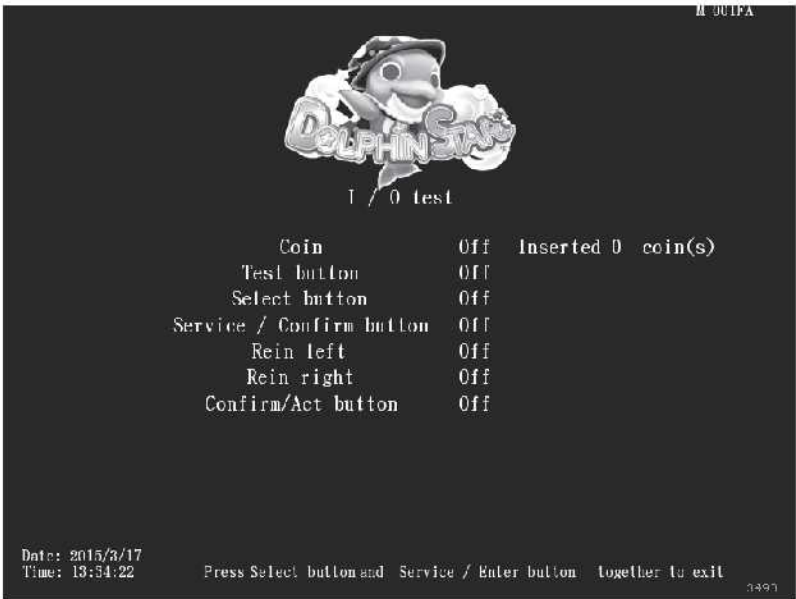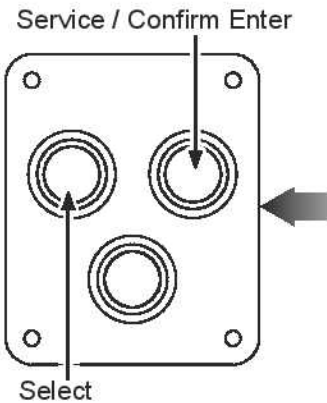

② Enter 【I/O test】 , you can run the testing of a specific application as explained in the chart below:

Application	Testing method	Result
Coin	Insert coin(s)	"Off" became "On" Coin has been inserted
Test	Press the button	"Off" became "On"
Select	Press the button	"Off" became "On"
Service / Enter button	Press the button	"Off" became "On"
Rein left	Pull the rein left	"Off" became "On"
Rein right	Pull the rein right	"Off" became "On"
Confirm / Act	Press the button	"Off" became "On"


③ After testing is completed, Press the 【Select】 and 【Service / Enter】 together to return 【Hardware test】 .

4.3.3 Motor test


This test allows you to test the swing motor work in function.

① Enter 【Operator settings】 → 【Hardware test】 , select 【Motor test】 and press 【Service /Enter】 button to start test, and the screen will display as below :

Service / Confirm Enter

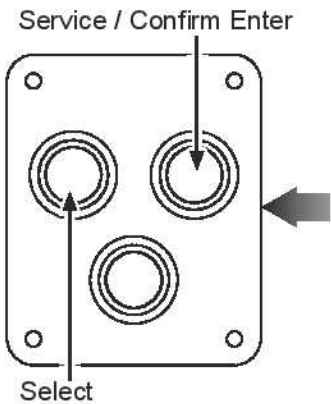

Select

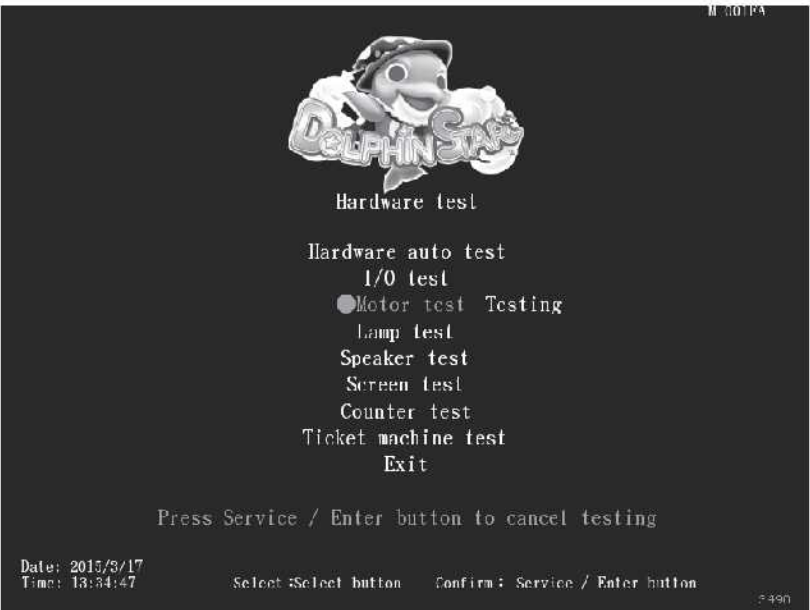



④ When the test is operating, you can press the 【Service / Enter】 button again to stop the test.

## Operator settings

### 4.3.4 Lamp test

This test allows you to test all the lamp work in function.

- 1 Enter 【Operator settings】 → 【Hardware test】 , select 【Lamp test】 and press 【Service /Enter】 button to start test, and the screen will display as below :

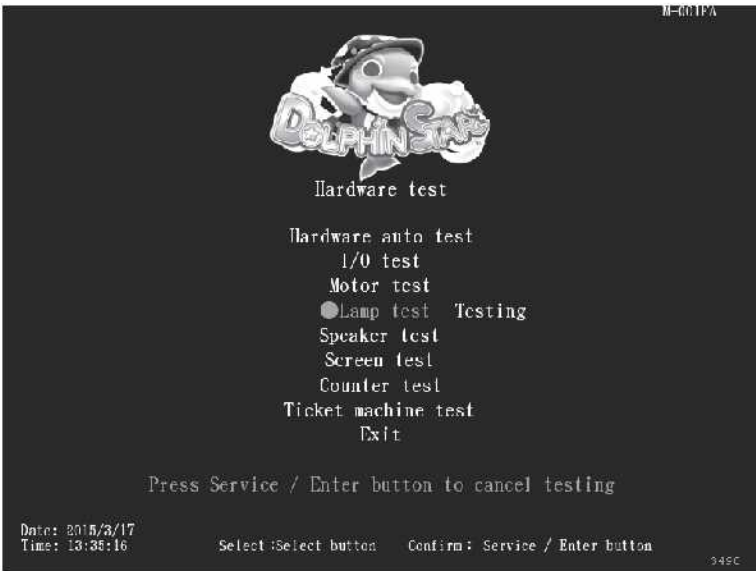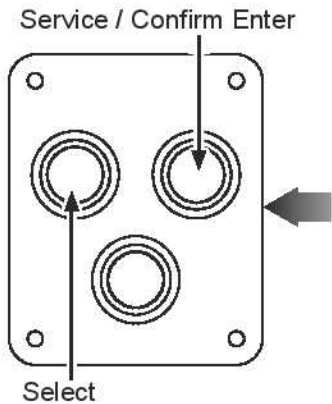


- 2 When start lamp test, the screen interactive lamp、dolphin body and the base show as 3 kinds of RGB light. The order will be Red → Green → Blue.
- 3 When the test is operating, you can press the 【Service / Enter】 button again to stop the test.

### 4.3.5 Speaker test

This test allows you to test the speaker work in function.

- 1 Enter 【Operator settings】 → 【Hardware test】 , select 【Speaker test】 and press 【Service /Enter】 button to start test, and the screen will display as below :

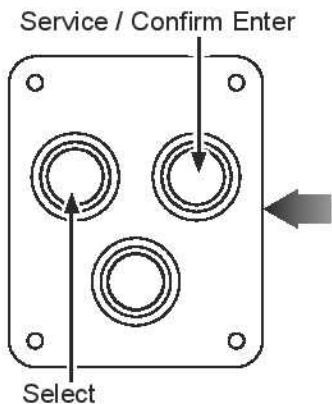


- 2 The speaker being tested will keep producing a certain sound.
- 3 When the test is operating, you can press the 【Service / Enter】 button again to stop the test.

### 4.3.6 Screen test

In the page of 【Screen test】 , you can test whether the white balance, color level, and lattice are normally functioning or not.

- ① Enter 【Operator settings】 → 【Hardware test】 → 【Screen test】 .
- ② After you enter the page of 【Screen test】 , the system will then process the testing, and the following six pictures will be displayed for you to adjust the white balance, color level, and lattice.

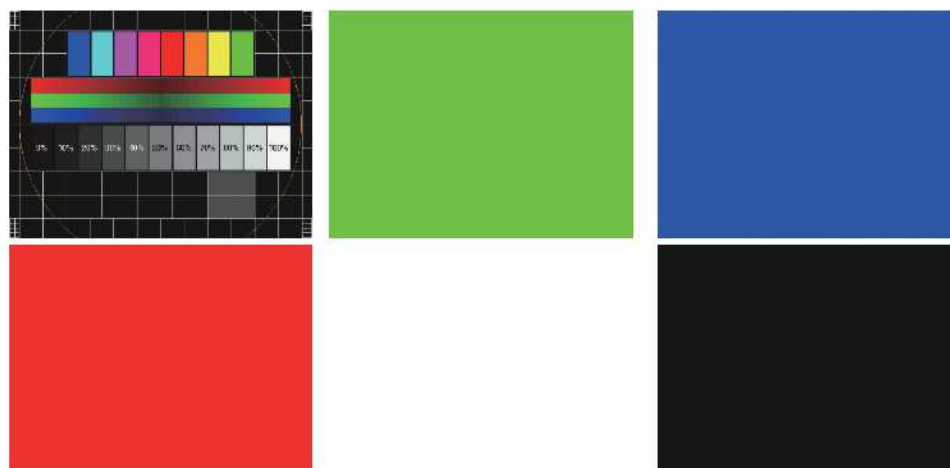


- ③ In the page of 【Screen test】 , press the 【Service / Enter】 button to change the displayed picture. After the testing is completed, leave this page and return to the 【Hardware test】

### 4.3.7 Counter test

In the page of 【Counter test】 , you can test whether the counter is normally functioning or not.

- ① Enter 【Operator settings】 → 【Hardware test】 → 【Counter test】 , and the screen will display as below :

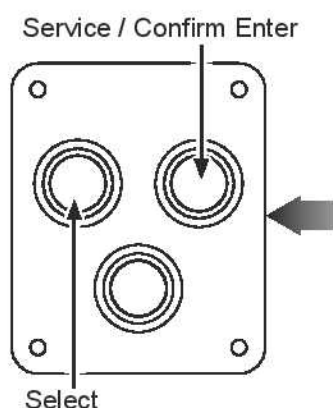

- ② After you enter the page of 【Counter test】 , insert coins to the coin slot, and the number on the right will go up as more coins are inserted. Also, the counter inside the coin counter will indicate the number too.
- ③ After testing is completed, press 【Service / Enter】 button to return to 【Hardware test】 .




## Operator settings

### 4.3.8 Ticket machine test

In the page of 【Ticket machine test】 , you can test the ticket machine is normally functioning or not.

- 1 Enter 【Operator settings】 → 【Hardware test】 → 【Ticket machine test】 , and the screen will display as below :

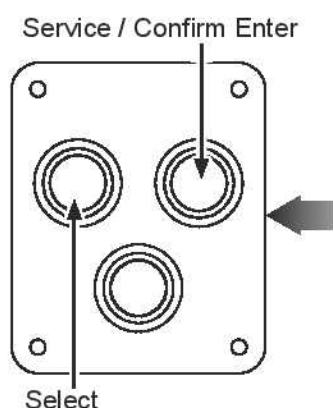


- 2 Press 【Service / Enter】 button to start test.
- 3 When the test is completed, move the cursor to the 【Exit】 , and press 【Service / Enter】 button to return to 【Hardware test】 .

PS: This is test only available on the machine has installed the ticket machine.

## 4.4 Game settings

In the page of 【Game settings】 , you can set up all related features of the game.

- 1 Enter 【Operator settings】 → 【Game settings】 , and the screen will display as below :

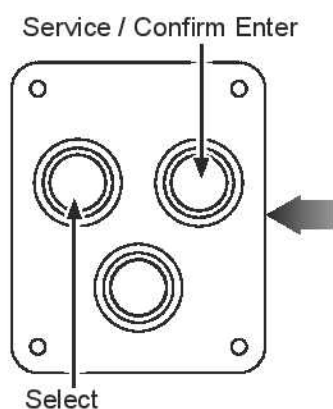


- 2 Use the 【Select】 button to move the cursor, and item where the cursor is pointed to will appear in red.
- 3 Use the 【Service / Enter】 button to confirm or enter the sub menu.
- 4 After setup is completed, return to 【Game settings】 and move the cursor to

- 【Exit】. Then press the 【Service / Enter】 button to return to the 【Operator settings】.
- ⑤ Regarding detailed descriptions of the sub menu in 【Game settings】, refer to the below content.

4.4.1 Flow settings

- In the page of 【Flow settings】, you can determine the duration of each process.
- ① Enter 【Operator settings】 → 【Game settings】 → 【Flow settings】, and the screen will display as below:

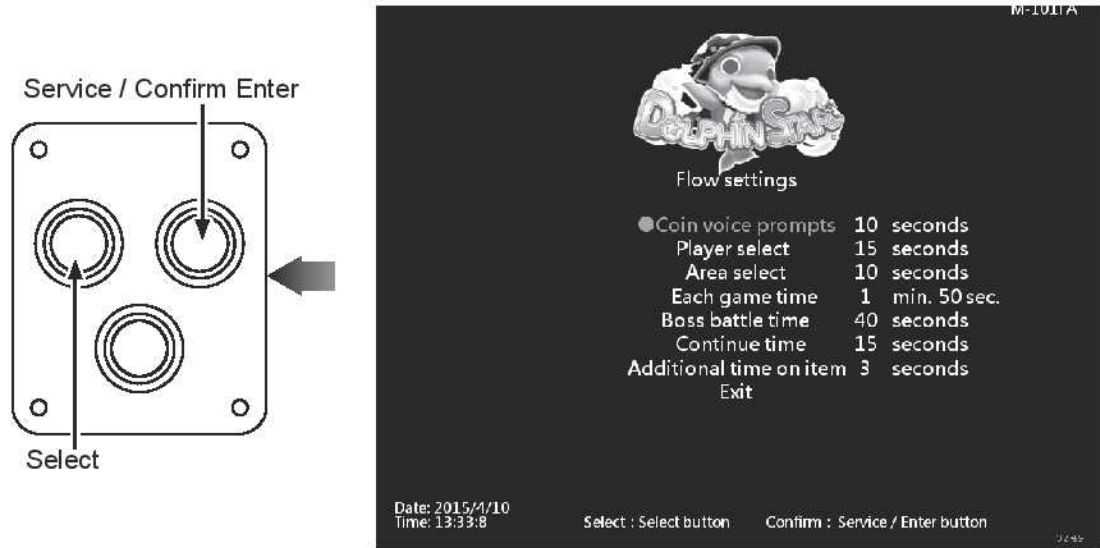

- ② Use the 【Select】 button functions to choose the item, and press 【Service / Enter】 button to start set-up.
- ③ When done, move the cursor to 【Exit】 and return to 【Game settings】.

4.4.2 Coin settings

- In the page of 【Coin settings】 you can determine if free games are offered, and set up the required number of coins to start or continue a game.
- ① Enter 【Operator settings】 → 【Game settings】 → 【Coin settings】, and the screen will display as below:






## Operator settings

- ② Use the 【Select】 button functions to choose the item, and press 【Service / Enter】 button to start set-up.
- ③ When done, move the cursor to 【Exit】 and return to 【Game settings】 .

### 4.4.3 Volume settings

In the page of 【Volume settings】 , you can determine the start time of daytime and evening and the corresponding volume.

- ① Enter 【Operator settings】 → 【Game settings】 → 【Volume settings】 , and the screen will display as below :

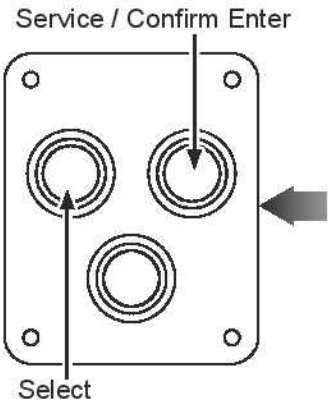


- ② Use the 【Select】 button functions to choose the items, and press 【Service / Enter】 button to start set-up.
- ③ When done, move the cursor to 【Exit】 and return to 【Game settings】 .


### 4.4.4 Lamp settings

In the page of 【Lamp settings】 , you can determine the start time of daytime and evening and the corresponding Lamp.

- ① Enter 【Operator settings】 → 【Game settings】 → 【Lamp settings】 , and the screen display as below :

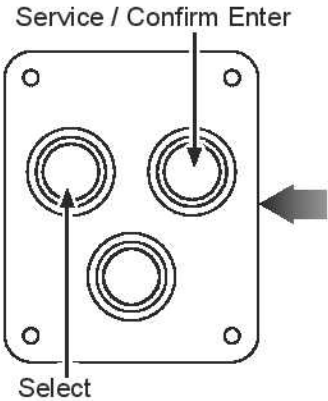

② Use the 【Select】 button functions to choose the items.

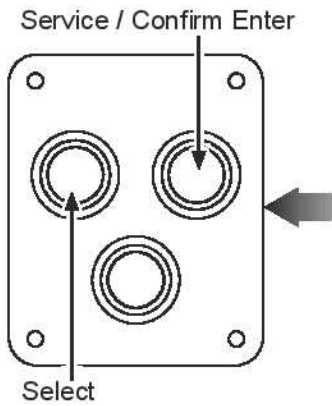

③ Then press the 【Service / Enter】 button to enter the page of 【Daytime(Evening) lamp settings】 .



④ Use the 【Select】 button functions to choose the items.

⑤ When the setting is completed, move the cursor to 【Exit】 to leave this page.

### 4.4.5 Ticket machine settings

In the page of 【Ticket machine settings】 , you can set up how many tickets provide in each game.

① Enter 【Operator settings】 → 【Game settings】 → 【Ticket machine settings】 , and the screen will display as below :

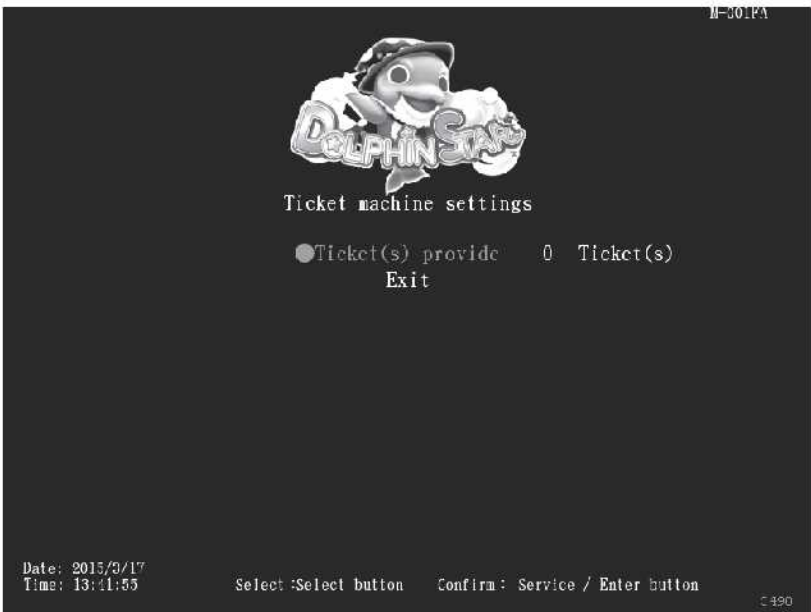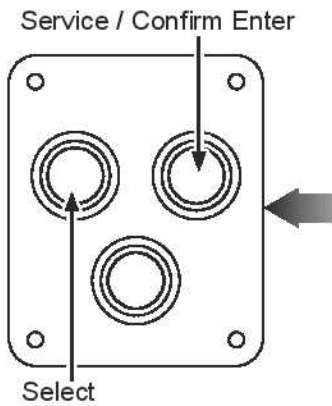

② Press the 【Service / Enter】 button and use the 【Select】 button to choose ticket number .

③ When done, move the cursor to 【Exit】 and return to 【Game settings】 .

## Maintenance and repair

### 4.4.6 Weight limit settings

In the page of 【Weight limit settings】 , you can setting the weight limit in "warning page".

- ① Enter 【Operator settings】 → 【Game settings】 → 【Weight limit settings】 ,and the screen will display as below :




- ② Press 【Service /Enter】 and use the 【Select】 button function to choose the items.
- ③ When done, move the cursor to 【Exit】 and return to 【Game settings】 .

### 4.4.7 Time settings

In the page of 【Time settings】 , you can set up your local time.

- ① Enter 【Operator settings】 → 【Game settings】 → 【Time settings】 , and the screen will display as below :

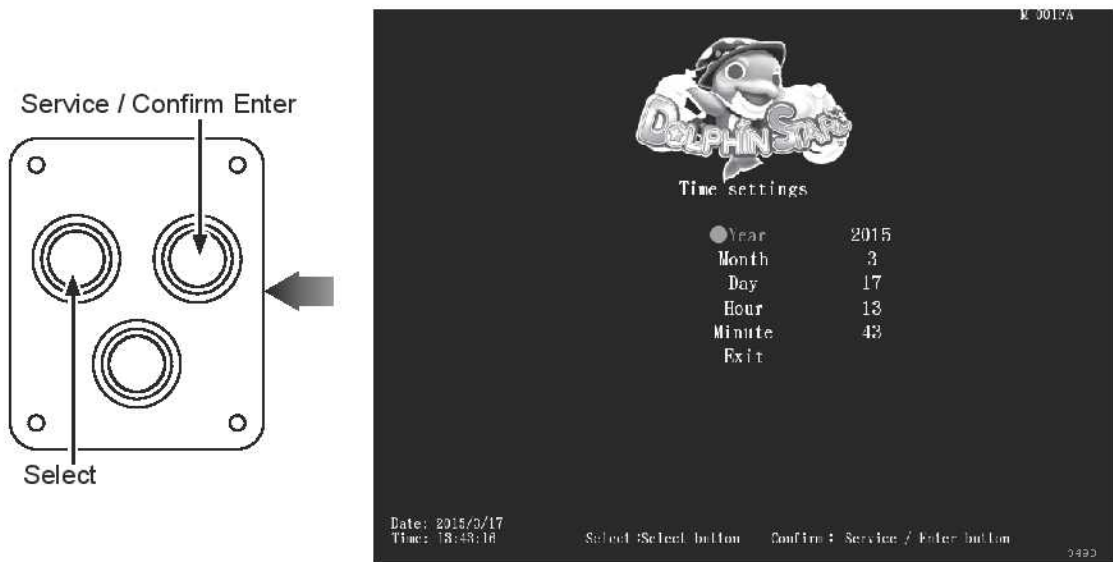


- ② Press 【Service / Enter】 and use the 【Select】 button function to choose the items.
- ③ When done, move the cursor to 【Exit】 and return to 【Game settings】 .

#### 4.4.8 Password settings

In the page of **【Password settings】**, you can setting the password for entering the operator settings.

- 1 Enter **【Operator settings】** → **【Game settings】** → **【Password settings】**, and the screen will display as below:

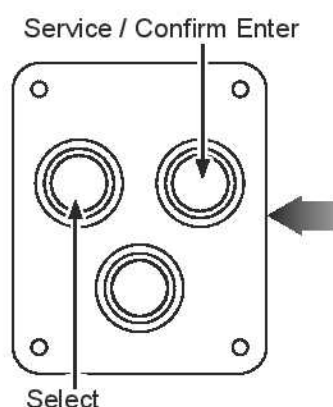


- 2 Press **【Service / Enter】** button to confirm.
- 3 When changing the password, you must enter old password first, when the old password is confirmed, enter the new password twice.  
PS: Default password: 000000
- 4 After the new password is confirmed, your password is changed, use new password to enter operator settings next time
- 5 Move the cursor to **【Exit】** and press **【Service / Enter】** button return to **【Game settings】**

#### 4.4.9 Restore default settings

In the page of **【Restore default settings】**, you can reset the game settings to the default settings.

- 1 Enter **【Operator settings】** → **【Game settings】** → **【Restore default settings】**, and the screen will display as below:

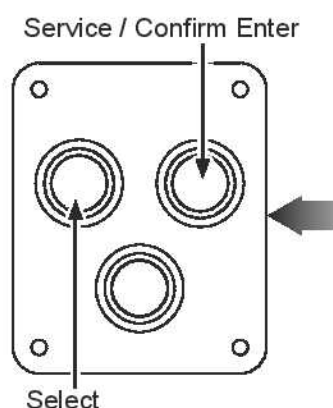




## Maintenance and repair

- ② Use the 【Select】 button function to choose the 【Yes】 or 【No】 .
  - ③ When 【Yes】 is chosen, press the 【Service / Enter】 button to start the resetting process.
  - ④ After the resetting process, an icon of 【Completed】 will pop up, then press the 【Service /Enter】 button to return to 【Game settings】 .
- PS: Restore to default settings only affect to game settings.
- ⑤ When 【No】 is chosen, then the screen will automatically direct to the page of 【Game settings】 .
- PS: It won't reset the password to default.

### 4.4.10 Reset ranking

In the page of 【Reset ranking】 ,you can reset the ranking in game.

- ① Enter 【Operator settings】 → 【Game settings】 → 【Reset ranking】 , and the screen will display as below:

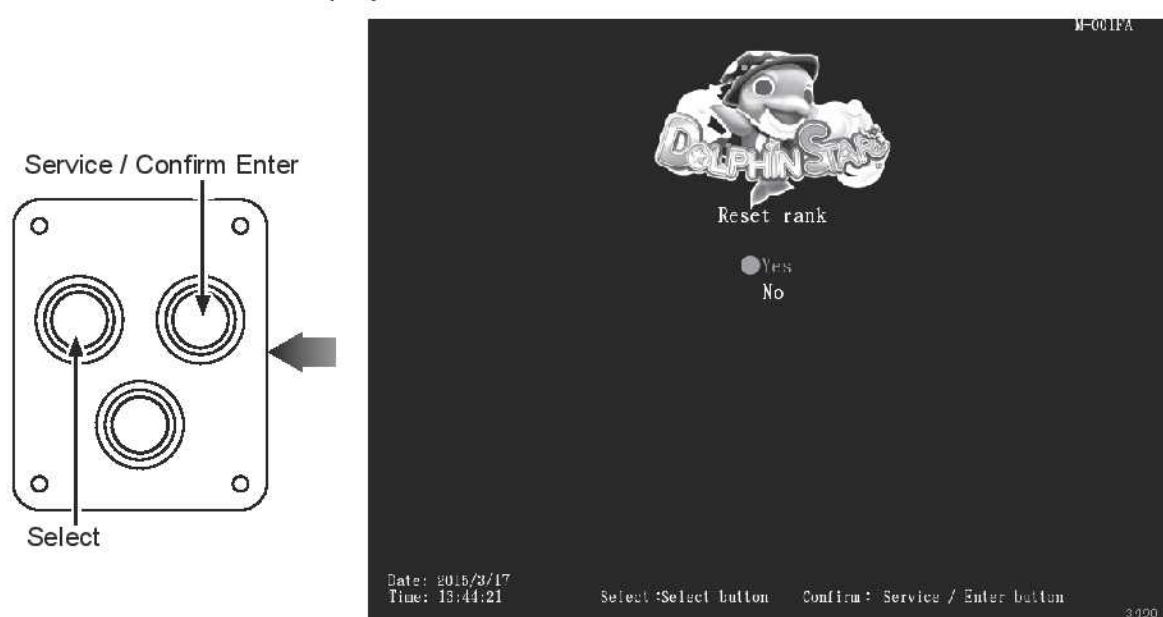


- ② Use the 【Select】 button function to choose the 【Yes】 or 【No】 .
- ③ When 【Yes】 is chosen, press the 【Service / Enter】 button to start the resetting process.
- ④ When 【No】 is chosen, then the screen will automatically direct to the page of 【Game settings】 .
- ⑤ When 【No】 is chosen, then the screen will automatically direct to the page of 【Game settings】 .



4.5 Income data



In the page of 【Income data】 , you can check the daily, monthly and total revenue.  
① Enter 【Operator settings】 → 【Income data】 , and the screen will display as below :

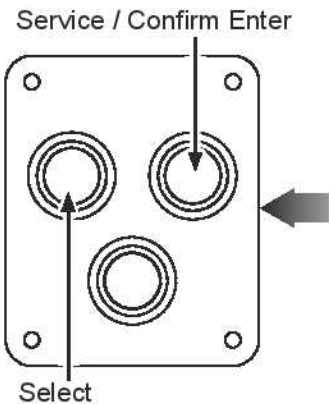

- ② Use the 【Select】 button to move the cursor, and item where the cursor is pointed to will appear in red.
- ③ Use the 【Service / Enter】 button to confirm or enter the sub menu.
- ④ After setup is completed, return to 【Game settings】 and move the cursor to 【Exit】 . Then press the 【Service / Enter】 button to return to the 【Operator settings】 .
- ⑤ Regarding detailed descriptions of the sub menu in 【Income data】 , refer to the below content.

4.5.1 Daily Income

In the page of 【Daily income】 , you can check the daily revenue of each cabinet.  
① Enter 【Operator settings】 → 【Income data】 → 【Daily income】 , and the screen will display as below :

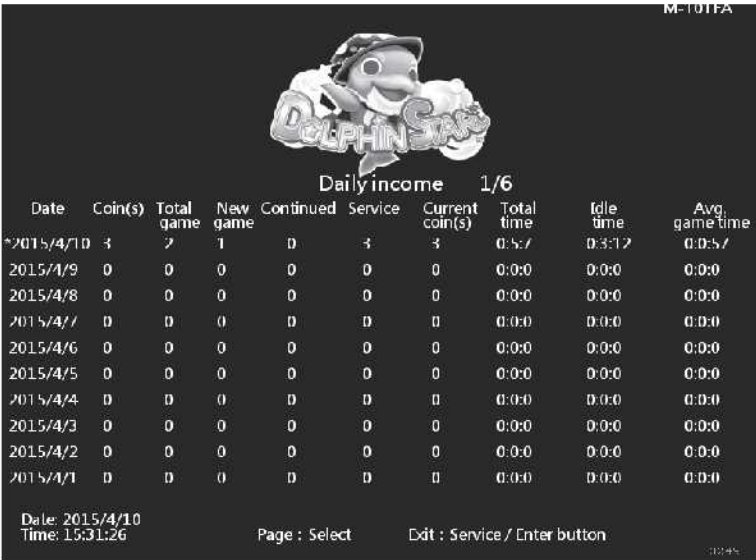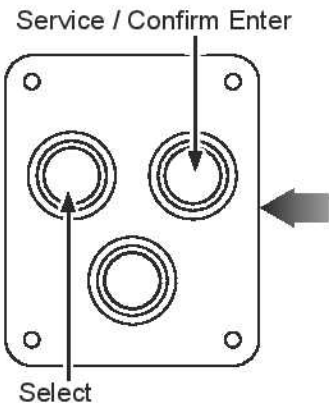

Maintenance and repair

Descriptions of each item :

Item	Descriptions
Data	Date of data
Coin(s)	The total number of coins inserted that day
Total game	The total number of games played that day
New game	The total number of new games that day
Continued	The total number of games continued that day
Service	The total time of service use that day
Current coin(s)	The actual number of coins counted that day
Total time	The entire duration of time when the cabinet is turned on that day
Idle time	The entire duration of idle time that day
Avg. game time	The average play time of the day Formula: (Total time — Idle time) / Total game


- ② Use the 【Select】 button function to move the page, and press the 【Service / Enter】 button to return to 【Income data】 .

4.5.2 Monthly income

In the page of 【Monthly income】 ,you can check the month revenue of each cabinet.


- ① Enter 【Operator settings】 → 【Income data】 → 【Monthly income】 , and the screen will display as below :

Service / Confirm Enter

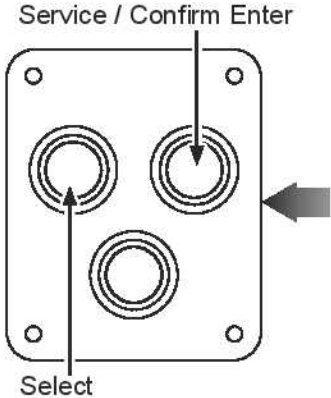

Select

M-101FA

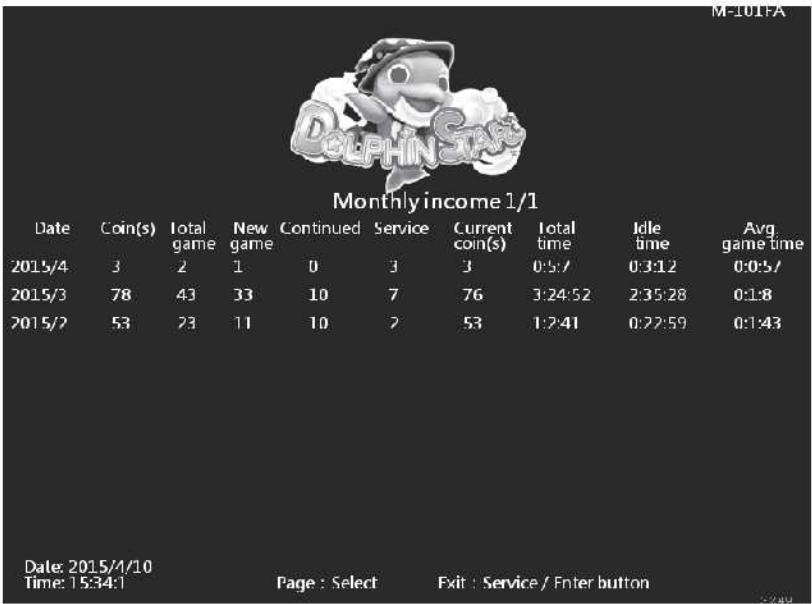

Date	Coin(s)	Total game	New game	Continued	Service	Current coin(s)	Total time	Idle time	Avg. game time
2015/4	3	2	1	0	3	3	0:5:7	0:3:12	0:0:57
2015/3	78	43	33	10	7	76	3:24:52	2:35:28	0:1:8
2015/2	53	23	11	10	2	53	1:2:41	0:22:59	0:1:43

Date: 2015/4/10  
Time: 15:34:1

Page : Select

Exit : Service / Enter button

Monthly income :

Item	Descriptions
Date	Date of data
Coin(s)	The total number of coins inserted that month
Total game	The total number of games played that month
New game	The total number of new games that month
Continued	The total number of games continued that month
Service	The total time of service use that month
Current coin(s)	The actual number of coins counted that month
Total time	The entire duration of time when the cabinet is turned on that month
Idle time	The entire duration of idle time that month
Avg. game time	The average play time of the month Formula: (Total time — Idle time) / Total game


- ② Use the 【Select】 button function to move the page, and press the 【Service / Enter】 button to return to 【Income data】

4.5.3 Total income


In the page of 【Total income】 , you can check the total revenue of each cabinet.

- ① Enter 【Operator settings】 → 【Income data】 → 【Total income】 , and the screen will display as below :

Service / Confirm Enter

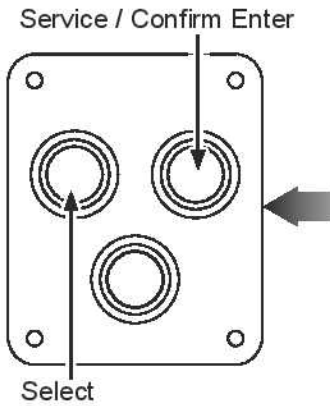

Select

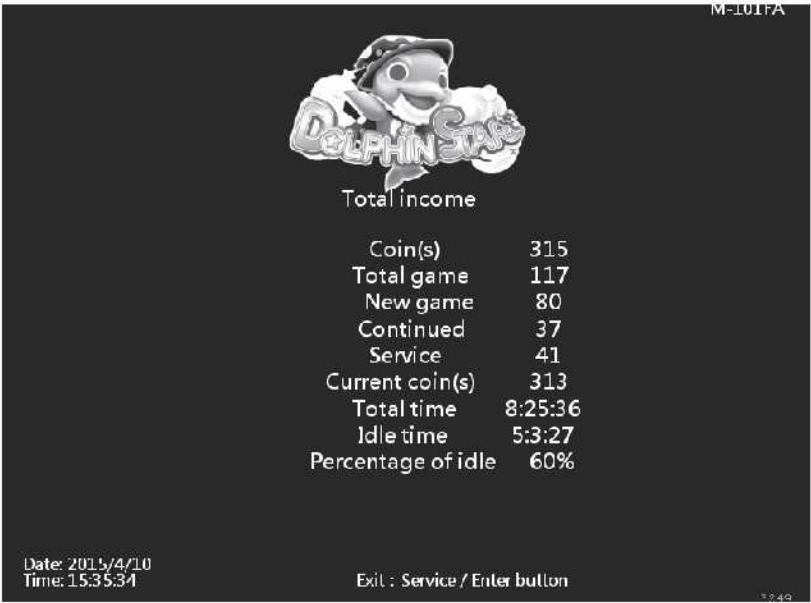

M-101FA

**DOLPHIN STATE**

Total income

Coin(s) 315

Total game 117

New game 80

Continued 37

Service 41

Current coin(s) 313

Total time 8:25:36

Idle time 5:3:27

Percentage of idle 60%

Date: 2015/4/10  
Time: 15:35:34

Exit : Service / Enter button

T.2.49

Maintenance and repair

Descriptions of each item:


Item	Descriptions
Coin(s)	The total number of coins inserted
Total game	The total number of games played
New game	The total number of new game created
Continued	The total number of games continued
Service	The total use times of the service button
Current coin(s)	The actual number of coin counted
Total time	The entire duration of time when the cabinet is turned of games total time
Idle time	The entire duration of idle time
Percentage of idle	The amount of idle time among the entire period when the cabinet is turned on Formula: (Idle time / Business time) X 100%

② Press the 【Service / Enter】 button to return to 【Income data】 .

4.5.4 Income data reset

In the page of 【Income data reset】 , you can delete the data of daily income and monthly income.

① Enter 【Operator settings】 → 【Income data】 → 【Income data reset】 , and the screen will display as below :

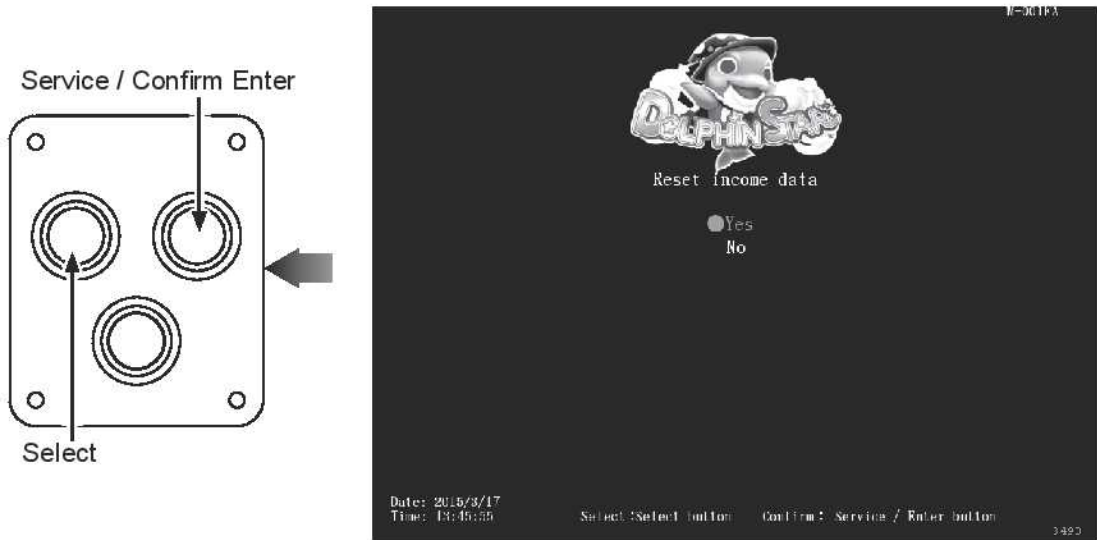

- ② Use the 【Select】 button function to choose between 【Yes】 and 【No】 .
- ③ When 【Yes】 is selected, press the 【Service / Enter】 button to reset the data.
- ④ When done, an icon of 【Completed】 will pop up, then press the 【Service / Enter】 button to return to 【Income data】 .
- ⑤ When 【No】 is selected, then the screen will automatically direct to the page of 【Income data】

Note: This function cannot delete the data of 【Total income】 .



# 5 Maintenance and repair

## 5.1 Daily inspection

To extend the life of this product, routinely maintain and inspect it.

### Exterior inspection:

Check if warning labels are coming off, dirty or unrecognizable. If so, replace them immediately.

- Well fastened.
- Check if the bottom bolts are fastened or not.
- Check if the light board is fastened or not.
- Clean the coin slot machine.
- Check if each plug is coming off or not.

### Checking the parts:

- Check if the loudspeakers are normally producing sound.
- Check if fluorescent lights and button lights are normal.
- Check if the display of the screen is clear enough.

## 5.2 Cleanness and maintenance

### Screen


To clean the screen, make sure to use a soft dry cloth without showing the end of the thread, and cloth made of microfiber is recommended such as glass cloth. Do not use detergents containing alcohol, acetone and any other chemicals. If you are not sure about the ingredients of the detergent, do not use it.

### Cleaning the acrylic plate of the cabinet

The acrylic plate of the cabinet should be cleaned every day. To Clean it, make sure to use a soft dry cloth without showing the end of the thread, and cloth made of microfiber is recommended. (such as glass cloth)

### Cleaning the dolphinbody

To clean the dolphinbody, use toothpaste and common cleaner is recommended. Do not use detergents containing alcohol, acetone and any other chemicals. If you are not sure about the ingredients of the detergent, do not use it.

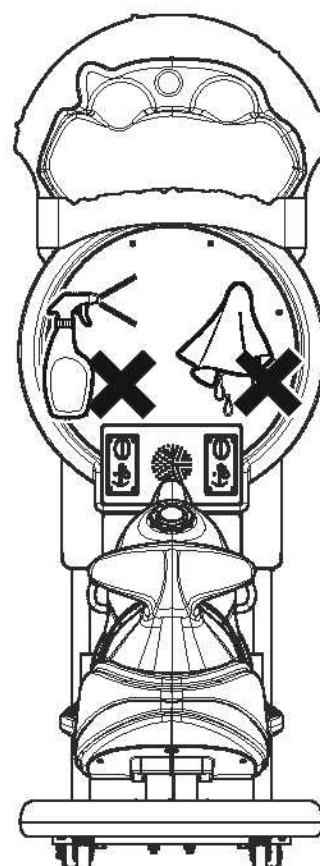





## Troubleshooting

### 5.3 Replacing parts


#### 5.3.1 Replacing the rein sensor

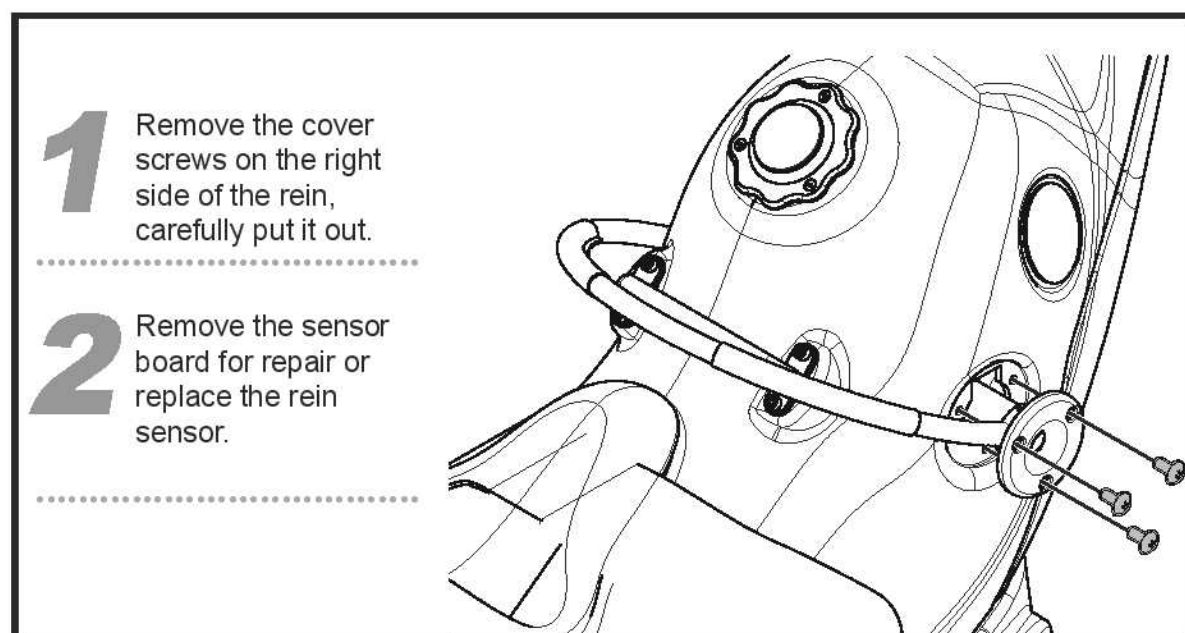


#### 5.3.2 Replacing the confirm button

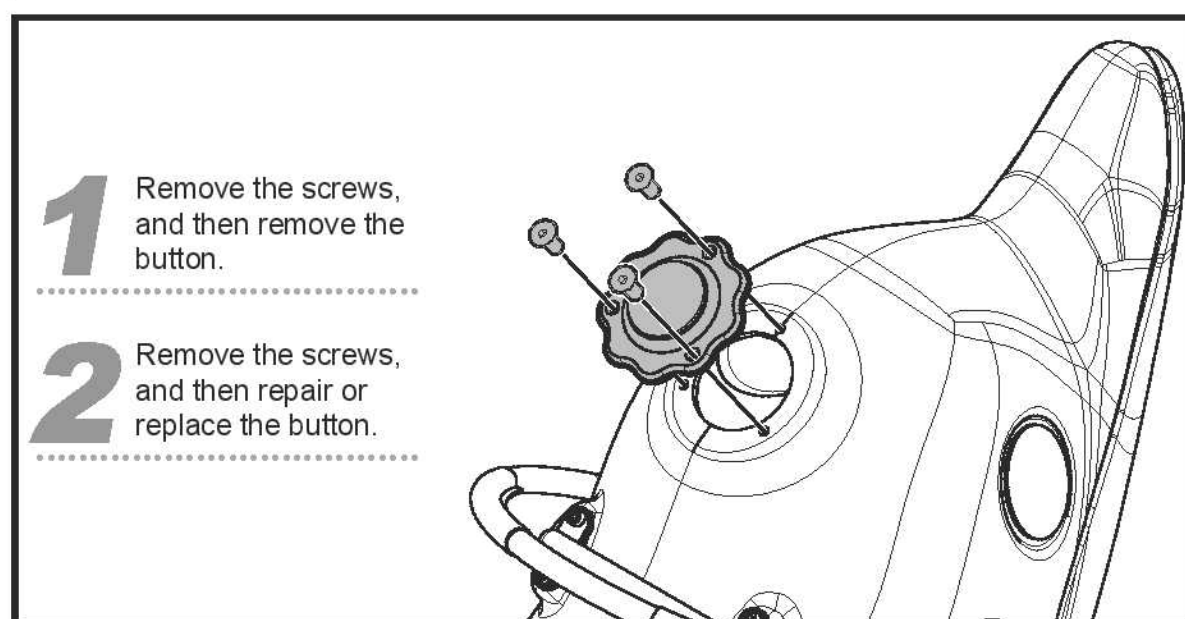


### 5.3.3 Replacing the dolphin body LED

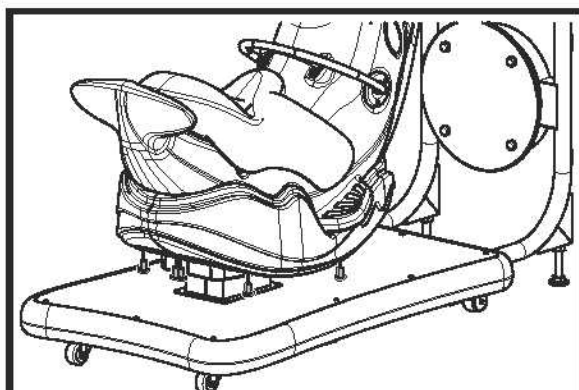


**1** Remove the screws on the dust-proof cover.

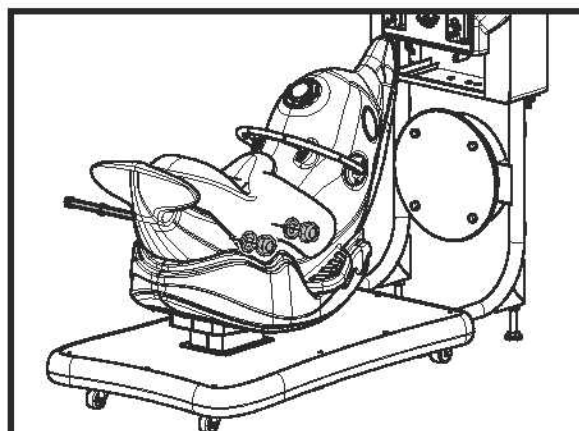

**2** Remove the dolphin body screws.

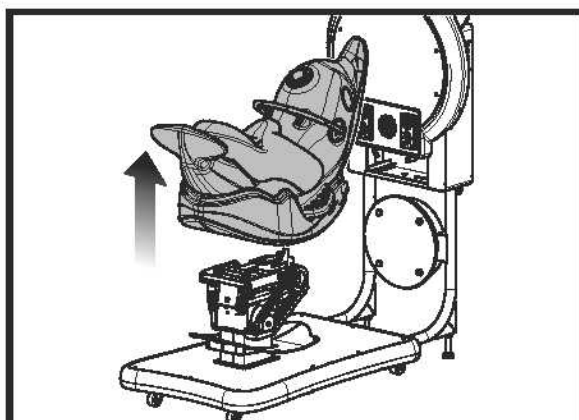

**3** Lift up the dolphin body upward.  
(Please check if the cable is not connected)

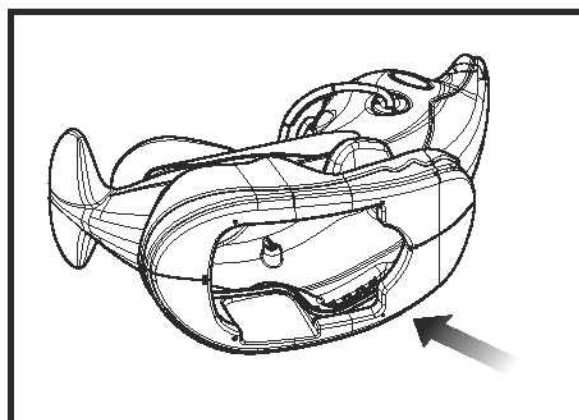


**4** Rotate the dolphin body and repair from the bottom.


## Troubleshooting

### 5.3.4 Replacing the I / O board


- 1** Remove the screws on the dust-proof cover.

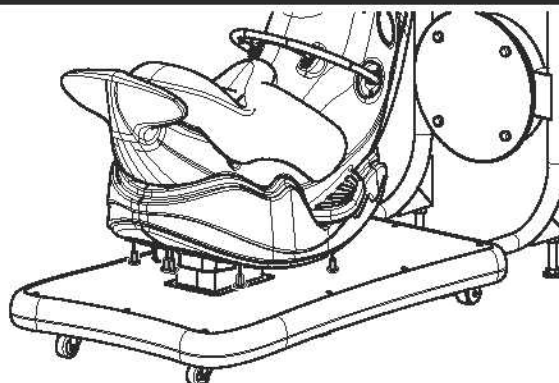


- 2** Remove the screws on the dolphin body.

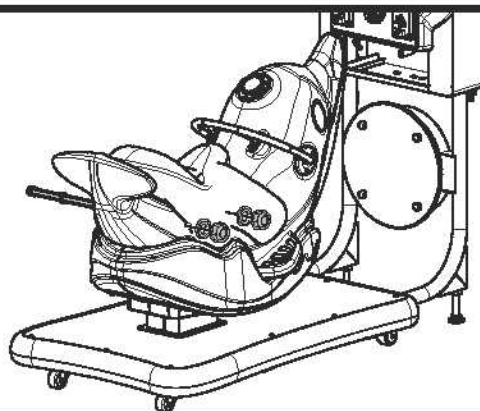

- 3** Lift the dolphin body upward. (Please check if cable is not connected)

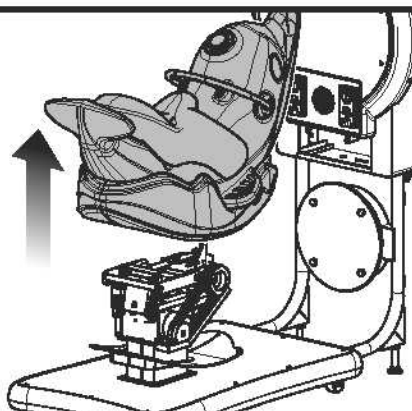


- 4** Remove the I / O board screws to repair or replace I / O board. When done, reassembly the parts according to the reversed assembly.

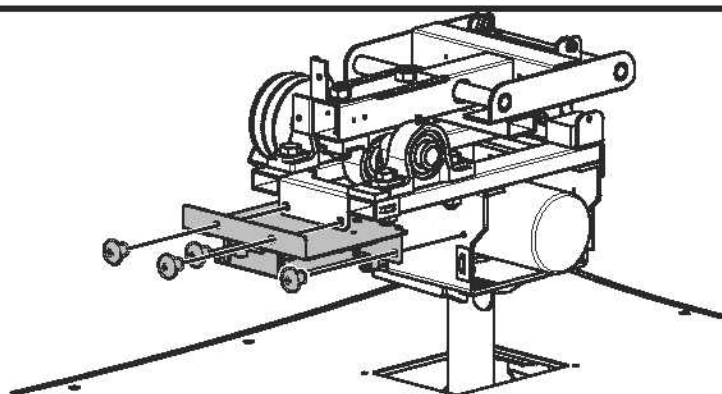

### 5.3.5 Replacing the speaker

- 1** Use the controlling panel key to open the maintains door, remove the nuts on the speaker.


- 2** Remove the speaker to repair or replace the speaker. When done, reassemble the parts according to the reversed assembly.

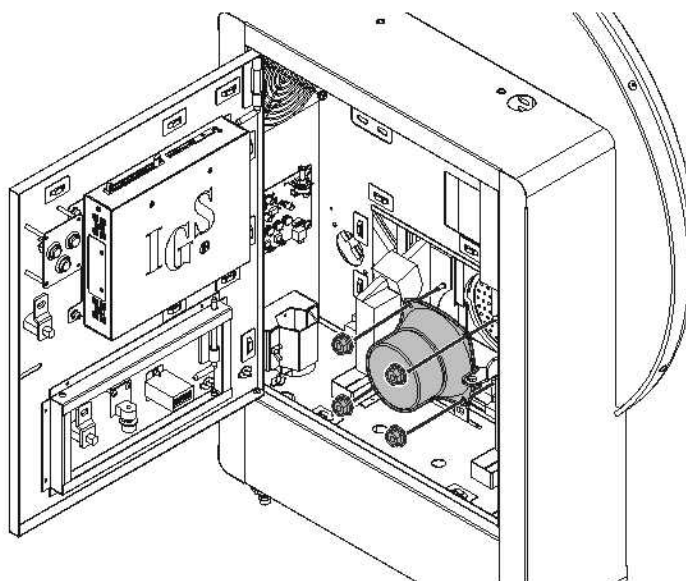

### 5.3.6 Replacing the main board

- 1** Use the controlling panel key to open the maintains door, remove the nuts on the main board.


- 2** Remove the main board to repair or replace the main board. When done, reassemble the parts according to the reversed assembly.

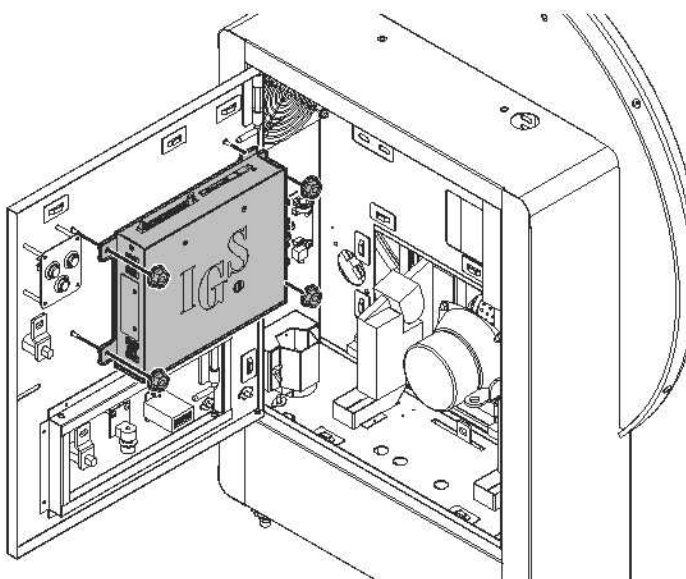


## Troubleshooting

### 5.3.7 Replacing the coin slot

- 1** Use the controlling panel key to open the maintains door, remove the nuts on the coin slot.
- .....

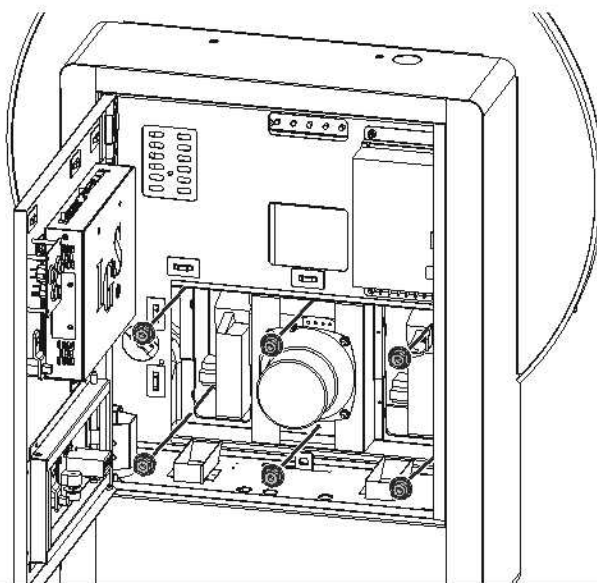


- 2** Remove the sheet metal fixed on the coin slot. Remove the nuts on the coin slot. Remove the coin slot to repair or replace the coin slot.
- .....
- .....

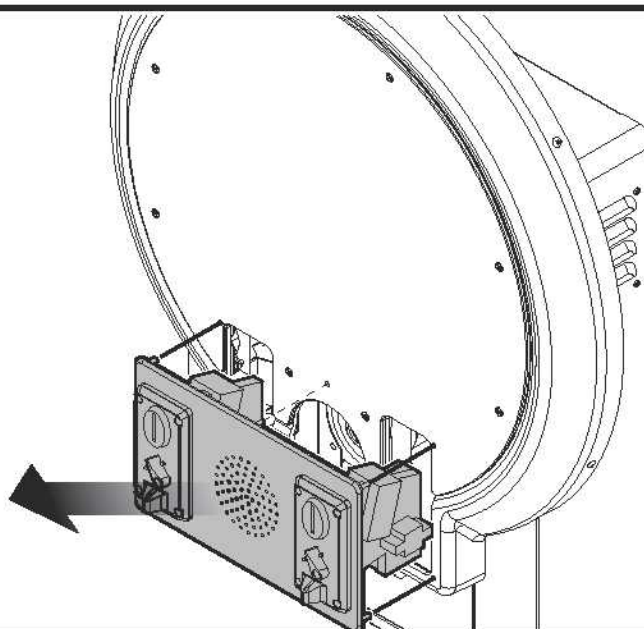





### 5.3.8 Replacing the screen and the LED

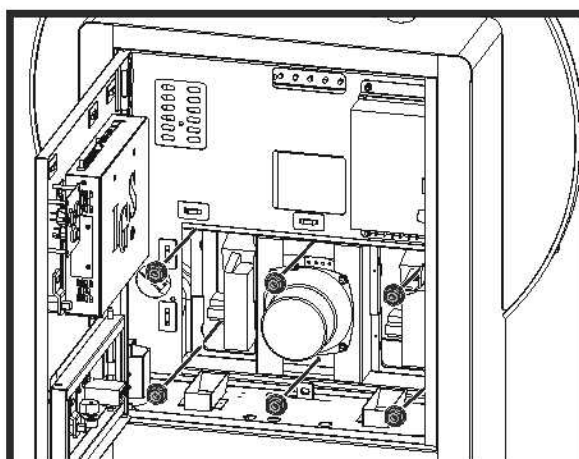


**1** Use the controlling panel key to open the maintains door to remove the nuts on the sheet metal.

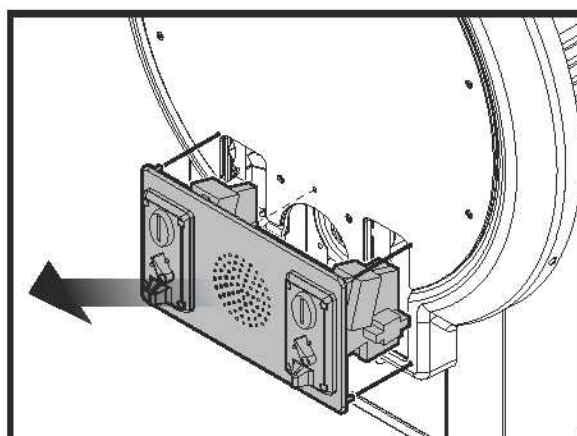


**2** Remove the sheet metal fixed on the coin slot.

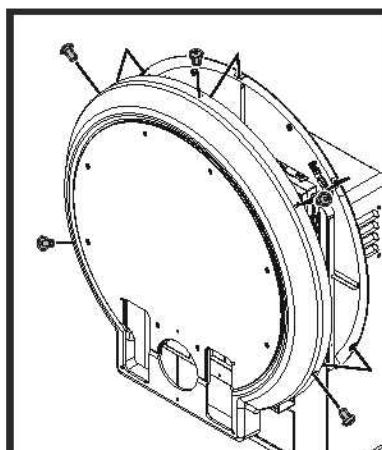

**3** Remove the nuts on the plastic cover.

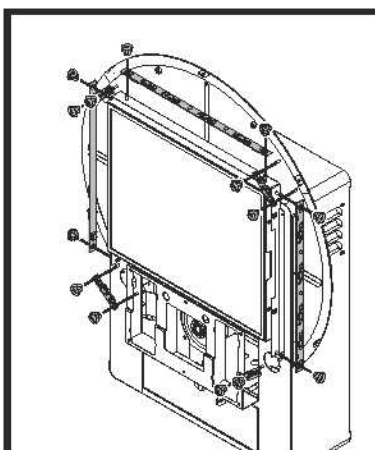

**4** Remove the LED board screws to repair or replace the LED board.

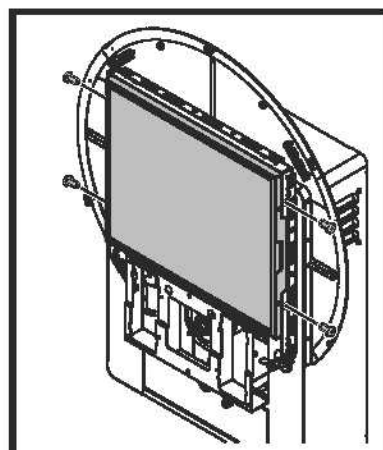

**5** Remove the screen screw to repair or replace the screen.

## Troubleshooting


### 5.3.9 Replacing AMP

**1** Use the controlling panel key to open the maintains door to remove the nuts on the AMP.

.....

**2** Remove the AMP to repair or replace the AMP. When done, reassembly the parts according to the reversed assembly.

.....

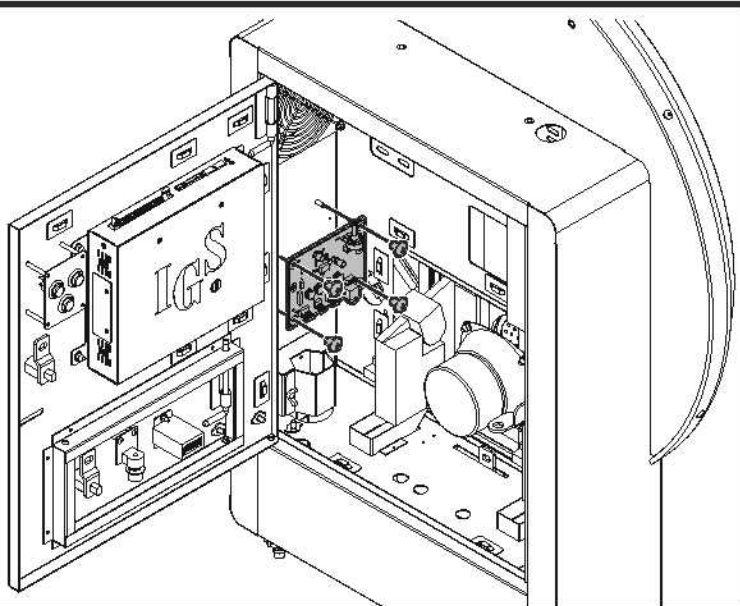

# 6 Troubleshooting

Problems	Easy troubleshooting
The rein and the button fail to work	<ul style="list-style-type: none"><li>■ Check the I/O board connection loose or not (See page 38 section 5.3.4 Replace the I/O board)</li><li>■ Enter: Operator settings → Hardware test → I / O test to run the testing (See page 20 section 4.3.2 I/O test)</li><li>■ If no testing results are shown, contact your local distributor.</li></ul>
The speakers do not produce	<ul style="list-style-type: none"><li>■ Open the door of the maintains door, and check if the master volume is adjusted to its minimum value.</li><li>■ Enter: Operator settings → Game settings → Volume settings to check the volume settings are correct. (See page 26 section 4.4.3 Volume settings)</li><li>■ Check if the plugs between the power amplifier and cabinet are coming off.</li><li>■ If no testing results are shown, contact your local distributor.</li></ul>
The screen appears blank after the power is on	<ul style="list-style-type: none"><li>■ Check if the plugs between the cabinet and screen are well connected, and whether D-sub connectors on both sides are coming off.</li><li>■ Check if the cabinet is plugged into the port of the video card.</li><li>■ If this problem persists, contact your local distributor.</li></ul>

※If any of the above mentioned problems is unsolvable, contact your local distributor.



© 版权所有 2015, International Games System Co., Ltd.

**Software Developer** 鈞象電子股份有限公司  
INTERNATIONAL GAMES SYSTEM CO., LTD.  
<http://www.igs.com.tw>  
TEL : +886-2-2299-5048  
FAX : +886-2-2290-1394



**Distributor** 毅興國際企業有限公司  
I CING INTERNATIONAL ENTERPRISE CO., LTD.  
[www.icing.com.tw](http://www.icing.com.tw)  
TEL:+886-37-747318  
FAX:+886-37-747685